

Via Marco Polo, 14 - Mestrino (PD) Italy - Phone +39.049.9048811 - Fax +39.049.9048847 Customer Technical Assistance: Phone +39.049.9048911/12/14/51 - Fax +39.049.9048920

www.dabpumps.com











DAB PUMPS LTD.

Unit 4, Stortford Hall Industrial Park Dunmow Road, Bishops Stortford, Herts CM23 5GZ - UK

info.uk&eire@dwtgroup.com Tel.: +44 1279 652 776 Fax: +44 1279 657 727

DAB PUMPS B.V.

Brusselstraat 150 B-1702 Groot-Bijgaarden - Belgium info.belgium@dwtgroup.com Tel.: +32 2 4668353

Fax: +32 2 4669218

DAB PUMPS INC.

3226 Benchmark Drive Ladson, SC 29456 USA info.usa@dwtgroup.com Ph. : 1-843-797-5002

Fax : 1-843-797-3366

DWT GROUP Russia

100 bldg. 3 Dmitrovskoe highway, 127247 Moscow - Russia info.russia@dwtgroup.com Tel.: +7 495 739 52 50 Fax: +7 495 485-3618

DAB PUMPS B.V.

Albert Einsteinweg, 4 5151 DL Drunen - Nederland info.netherlands@dwtgroup.com

Tel.: +31 416 387280 Fax: +31 416 387299

■ DAB PUMPEN DEUTSCHLAND GmbH

Tackweg 11 D - 47918 Tönisvorst - Germany info.germany@dwtgroup.com Tel.: +49 2151 82136-0 Fax: +49 2151 82136-36

DAB PUMPS IBERICA S.L.

Parque Empresarial San Fernando Edificio Italia Planta 1ª 28830 - San Fernando De Henares - Madrid

info.spain@dwtgroup.com Ph.: +34 91 6569545 Fax: +34 91 6569676

DAB PUMPS CHINA

Shandong Sheng Qingdao Shi Jinji Jishu Kaifaqu Kaituo Rd ZIP PC266510

CN - China

info.china@dwtgroup.com Tel.: +8613608963089 Fax: +8653286812210







3226 Benchmark Drive Ladson SC 29456 Phone 843-797-5002 - Fax 843-797-3366

http://www.dabpumps.us



CLEAR ANSWER

CLEAR ANSWER HYDRAULIC DATA





Pumps for Pound fountains & Water Falls

Submersible pumps to circulate water in garden ponds, create water falls and play water features.

Designed to work in both horizontal and vertical installations

Suitable to pump clear water containing particles with maximum diameter up to 1/3".

- * Circulating water in Garden ponds
- Water falls
- * Fountains
- Water features



TECHNICAL DATA

CONSTRUCTION


- Anti-corrosive and rust-proof materials
- Motor with thermic overload protection
- Wear resistant shaft and impeller
- Excellent cooling of the motor that enables the pump to operate even when it is partially submerged
- Supplied with power cable with plug and self-sealing fitting

TECHNICAL DATA

FEATURES & BENEFITS

- Plug & Play
- Designed to work in horizontal and vertical installations
- Large range to cover various requirements
- Provides Excellent flows"In a compact design"
- New Efficient motors
- 115v 60Hz
- CSA approval for USA & Canada
- New more robust motor and housing
- Built in thermic overload

TECHNICAL DAT											
Model	HP	Watts	Volts	Frequency	Amps	Max Solids	Max Flow	Max Head	Discharge		
CLEAR ANSWER 1	1/4	260	115	60 Hz	2.4	0.3"	31 gpm	21 ft			
CLEAR ANSWER 2	1/3	370	115	60 Hz	3.4	0.4"	44 gpm	30 ft	1" 1/4 NPT		
CLEARANSWER 3	1/2	820	115	60 Hz	7.6	0.4"	70 gpm	34 ft			

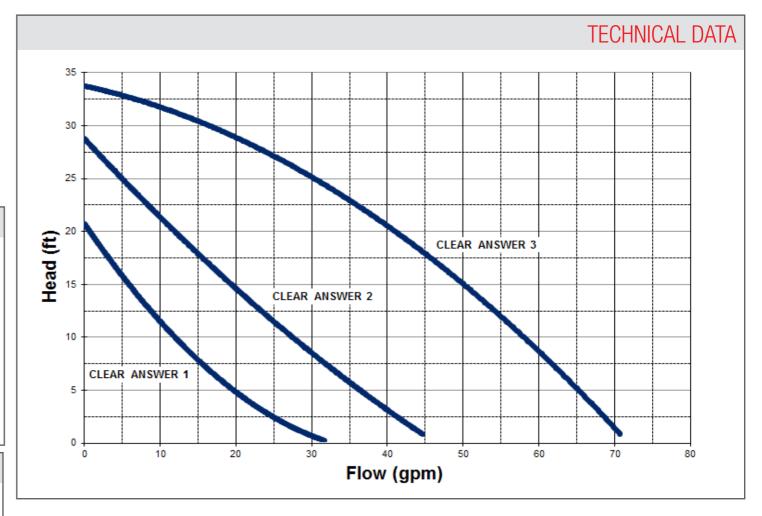

								DIMENSIONS
Mod	del	A	В	С	D	Weight	Pallet Qty	
CLE	AR ANSWER 1	10.5"	5.5"	6.1"	1.6"	10.5 lbs		
CLE	AR ANSWER 2	10.5"	5.5"	6.1"	1.6"	11.0 lbs	54	
CLE	AR ANSWER 3	11.8"	5.5"	6.1"	1.6"	15.4 lbs		P LANAAA

2