


S4 60Hz

4" SUBMERSIBLE ELECTRIC PUMPS

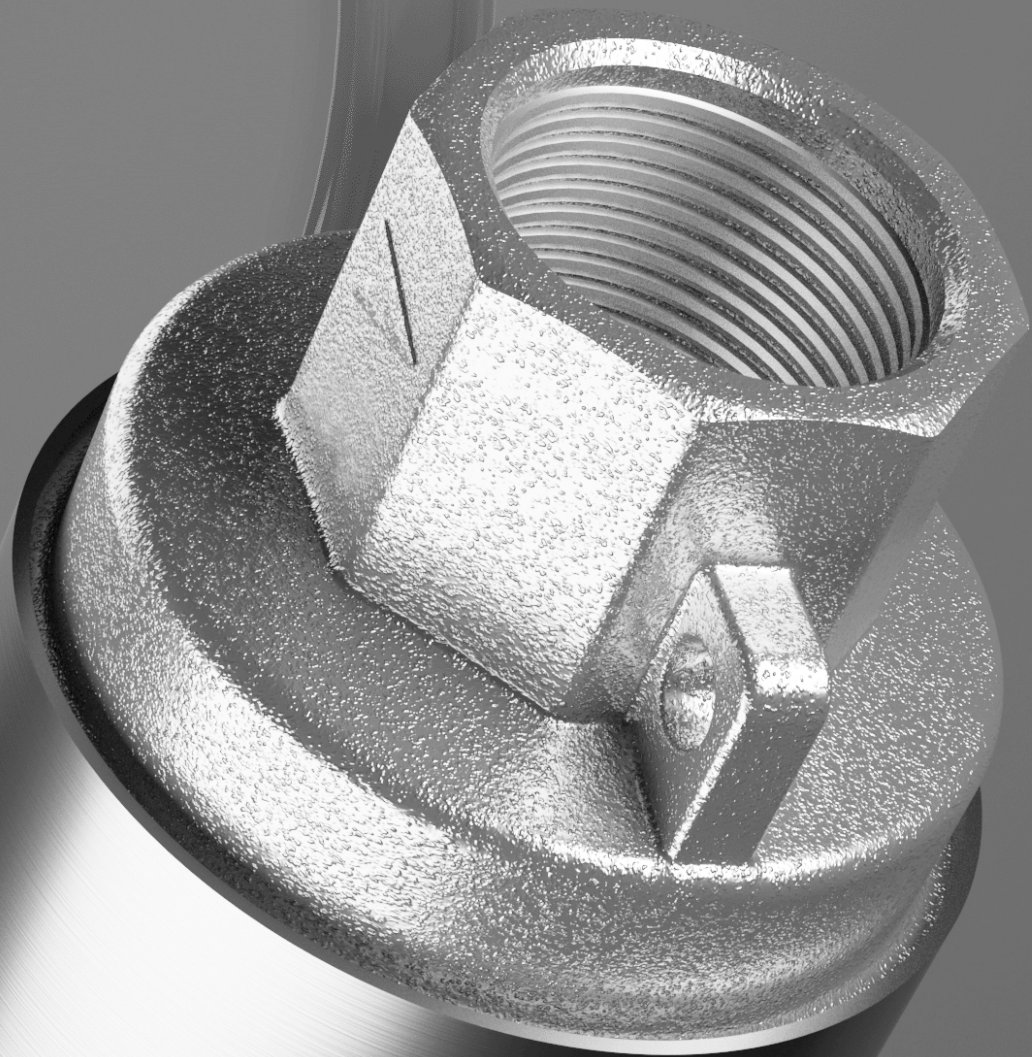

**TECHNICAL DATA****Flow rate:** up to 120 GPM**Head up to:** 1500 feet**Maximum immersion depth:** 4GG - 4TW: 984 feet**Type of pumped liquid:** Clean, free of solids and abrasive substances, non-viscous, non-aggressive, non-crystallized and chemically neutral**Sand quantity:** 5.42 lb/in³**Liquid temperature:** From +32°F to +104°F**Output connection:**

S4 5-25: 1" 1/4 NPT

S4 35-90: 2" NPT

Pump maximum diameter: 3.9 inches**Impeller/s material:** Technopolymer**Maximum number of starts:** 20/hour**Protection class:** IP68**Motor insulation class:** F**Single phase power input:** 1x115 V 60Hz / 1x230 V 60 Hz**Three phase power input:** 3x230 V 60 Hz / 3x460 V 60 Hz**Possible type of installation:** Fixed in vertical position. Horizontal installation is possible, it is recommended to install a cooling sleeve**Special versions on request:** Different voltages, different cable lengths, version with 4GX**Certification:** Pump end NSF61 & 372 approved.

4GG - 4TW motor: UL / CSA and NSF 61 & 372 approved

4" multi-impeller borehole pumps for clean water, designed for water boosting, gardening and irrigation, lifting water from boreholes in residential building service, commercial building service and irrigation systems also for agriculture. The S4 pumps must be installed in wells with a diameter of at least 4", or in tanks or cisterns and it increases the pressure of water that can then be used for example to water medium or large gardens or (in the case of models with a greater flow and head) in irrigation systems in agriculture.

Available as standard:

- Only pump end
- Pump body with water-filled motor 2WIRE
- Pump body with water-filled motor 3WIRE

CONSTRUCTION FEATURES OF THE PUMP

Technopolymer impellers housed with stainless steel adjustment rings. Pump liner, shaft, coupling with motor, integrated suction filter and cable guard are in stainless steel. Suction and delivery supports in micro-cast AISI 304 stainless steel. Removable built-in non-return valve in technopolymer or with stainless steel plate (depending on model, see the material table). Technopolymer impellers designed to ensure high levels of efficiency in accordance with PEI Directive starting from 25 GPM. NSF61 certificate is pending approval.

CONSTRUCTION FEATURES OF THE MOTOR

Pump can be coupled with 4" motors : 4GG, 4TW and 4GX.

4GG motors line includes single phase and three phase motors from 0.5 HP to 10 HP. 4TW is a single phase, 2 wire line from 0.5 HP to 1.5 HP. They are built based on resin canned stator technology. 4GG and 4GX single phase motors have to be installed with a control box, 4CBUS line sold separately, in the three-phase version the protection must be guaranteed by the user.

4TW motors are operated without starting control box, based on 2 wire technology with internal capacitor and thermal protector.


All parts in contact with water of 4GG and 4TW made in SS304, 4GX in full SS316.

All motors come with CSA approval, NSF61 is pending in process.

Suitable for use with Variable Speed Drive (30-60 Hz).


MATERIALS

N°	PART*	MATERIALS
1	SUCTION	PRECISION CAST STEEL AISI 304
2	SCREWS	STAINLESS STEEL AISI 304
3	STAGE HOUSING	S4 5 UP TO 1.5HP
		S4 7 UP TO 2HP
		S4 10÷90 UP TO 3HP
		S4 5/20
		S4 7/30
	S4 10÷90 ABOVE 3 HP	
4	IMPELLER	TECHNOPOLYMER
5	DIFFUSER	TECHNOPOLYMER
6	OUTER SLEEVE	STAINLESS STEEL AISI 304
7	THRUST BEARING	STAINLESS STEEL AISI 304
8	SHAFT SLEEVE	STAINLESS STEEL AISI 304
9	BUSH BEARING	RUBBER TPU
10	UPPER SUPPORT	TECHNOPOLYMER
11a	NON-RETURN VALVE	S4 5÷25
		S4 35÷90 UP TO 3HP
11b		S4 35÷90 ABOVE 3HP
12	DISCHARGE	PRECISION CAST STEEL AISI 304
13	CABLE SHEATH	STAINLESS STEEL AISI 304
14	INTERMEDIATE SHAFT SLEEVE	STAINLESS STEEL AISI 304
15	SHAFT WITH COUPLING	STAINLESS STEEL AISI 304
16	FILTER	STAINLESS STEEL AISI 304

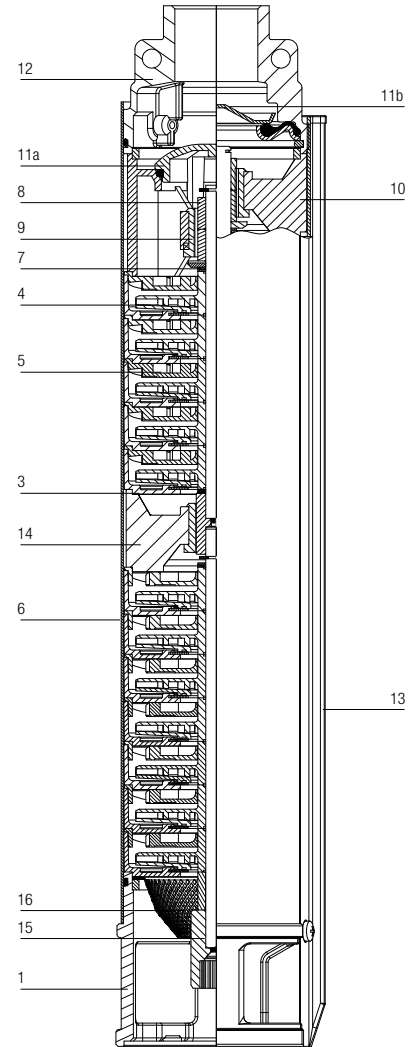

* In contact with the liquid.

– Denomination index: (example)

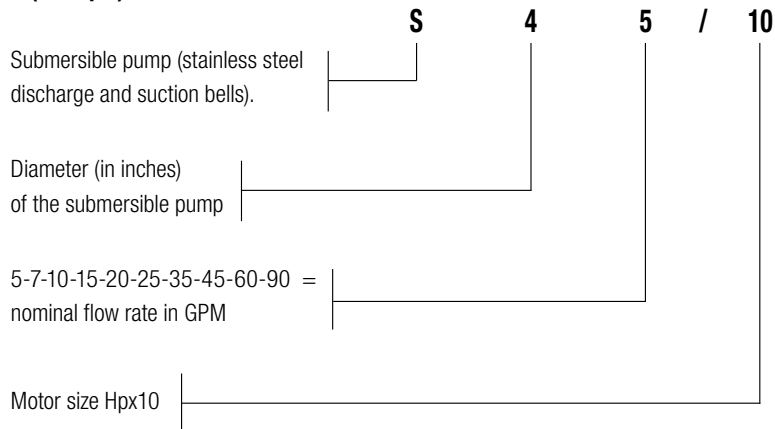

ELECTRICAL DATA AND DIMENSIONS

4" SUBMERSIBLE ELECTRIC PUMPS

MODEL	P2 hp	STAGES	LENGTH inch	GROSS WEIGHT lbs	DISCHARGE SIZE npt	ASSEMBLED VERSION	MOTOR TYPE	VOLTAGE
S4 5/05	0.5	11	15.8	7.3	1" 1/4		NO MOTOR	-
			29.3	28.5		YES*	4TW 2W	115
			26.3	26.7		YES*	4GG 3W	
			28.9	28.3		YES*	4TW 2W	230
			26.3	26.7		YES*	4GG 3W	
S4 5/07	0.75	15	18.5	8.6	1" 1/4		NO MOTOR	-
			32.3	31.9		YES*	4TW 2W	230
			29.8	30.0		YES*	4GG 3W	
S4 5/10	1	18	20.7	9.7	1" 1/4		NO MOTOR	-
			37.5	38.4		YES*	4TW 2W	230
			34.3	37.6		YES*	4GG 3W	
S4 5/15	1.5	25	25.5	11.7	1" 1/4		NO MOTOR	-
			44.1	44.3		YES*	4TW 2W	230
			40.9	44.1		YES*	4GG 3W	
S4 5/20	2	31	25.9	16.3	1" 1/4		NO MOTOR	-



* assembled version available with canned motor 4GG and 4TW

PUMP MODEL	HP	PSI	Depth to pumping water in feet																				Shut-Off (ft)			
			20	40	60	80	100	120	140	160	180	200	240	260	300	360	400	480	500	600	700	800		900	1000	
S4 5/05	1/2	0																								
		20					8	7.5	7	6.5	6	5	4	3.5	1											
		30				8	7.5	7	6	6	5	4.5	3	2												
		40			8	7.5	7	6.5	6	5	4.5	4														
		50	7.5	7	6.5	6	5.5	5	4	3.5	2.5															
		60	7	7	6.5	6	5.5	4.5	4	3.5																
	80	6.5	6	5.5	5	4	3.5																			
	Shut-off PSI	146	137	129	120	111	103	94	85	77	68	51	42	25											153	
S4 5/07	3/4	0																								
		20									8	7.5	7	6.5	5.5	4.5	3.5	2								
		30									7.5	7	7	6.5	6	5.5	5	3.5	2.5							
		40									7	7	7	6.5	6	5.5	5	4	3.5	2						
		50				7	7	6.5	6.5	6	5	5	4	3.5	3											
		60			7	7	6.5	6.5	6	5	5	4.5	3.5	3												
	80	7	7	6.5	6	6	5.5	5	4.5	4	3.5	3														
	Shut-off PSI	195	186	177	169	160	151	143	134	125	117	99	91	73	47	30									203	
S4 5/10	1	0																								
		20														7.5	7	6	5.5	4	3.5					
		30														7	7	6.5	5.5	4.5	3	2				
		40														7	7	6.5	6.5	6	5	4	2.5			
		50														7	7	6.5	6.5	5.5	4.5	3.5				
		60														7	7	6.5	6	5.5	5	4	3			
	80														7	7	6.5	6	5.5	5	3.5	2.5				
	Shut-off PSI	245	236	227	219	210	202	193	184	176	167	150	141	124	98	80	46	37							253	
S4 5/15	1.5	0																								
		20																								
		30																								
		40																								
		50																								
		60																								
	80																									
	Shut-off PSI	342	333	325	316	307	299	290	281	273	264	247	238	221	195	177	143	134	91	47	4				350	
S4 5/20	2	0																								
		20																								
		30																								
		40																								
		50																								
		60																								
	80																									
	Shut-off PSI	419	410	401	393	384	375	367	358	349	341	323	315	297	271	254	219	211	168	124	81	38			427	

NOTE: performances shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.

S45

4" SUBMERSIBLE ELECTRIC PUMPS

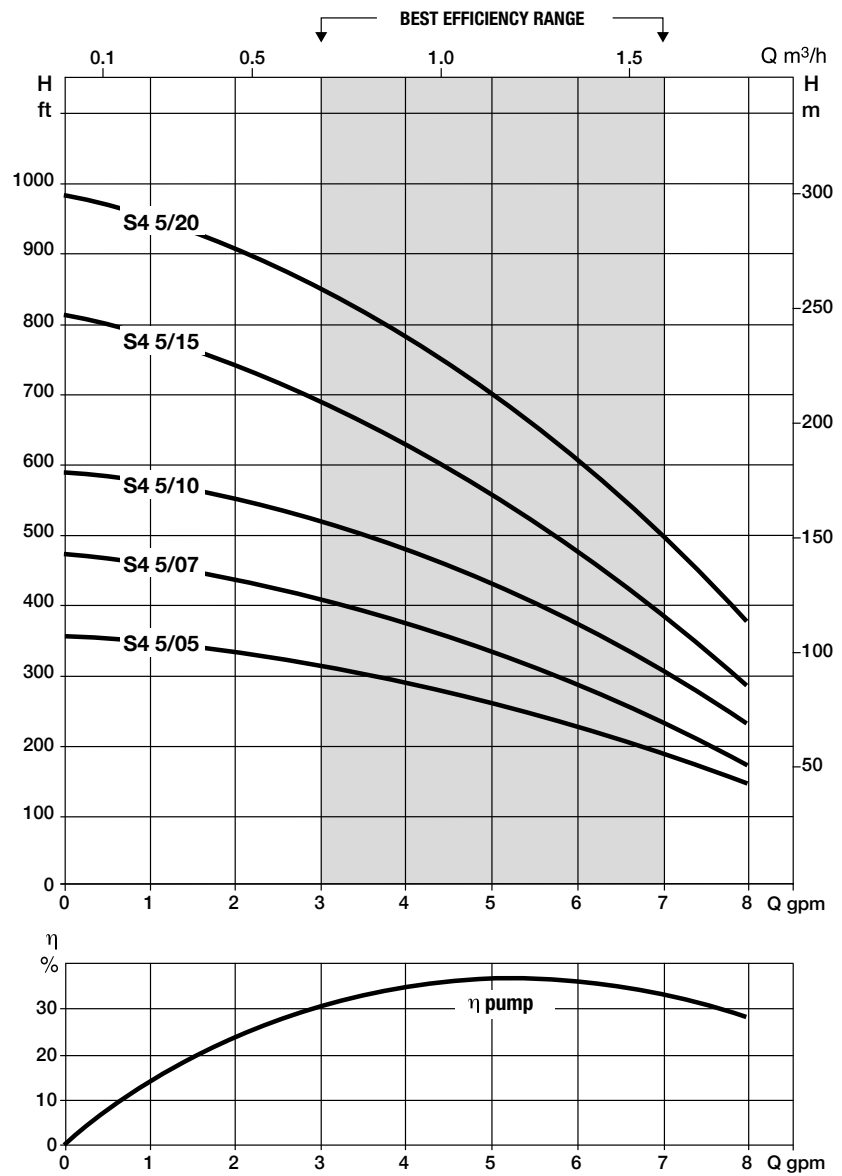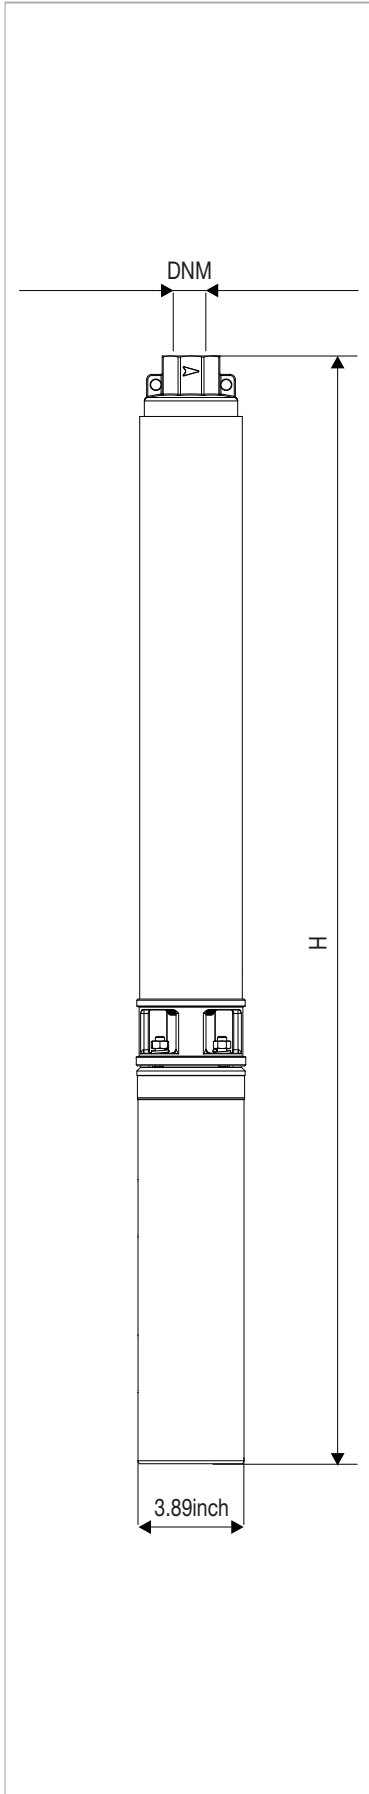

Curve tolerance according to ISO 9906

ELECTRICAL DATA AND DIMENSIONS

4" SUBMERSIBLE ELECTRIC PUMPS

MODEL	P2 hp	STAGES	LENGTH inch	GROSS WEIGHT lbs	DISCHARGE SIZE npt	ASSEMBLED VERSION	MOTOR TYPE	VOLTAGE
S4 7/05	0.5	8	15.6	6.0	1" 1/4		NO MOTOR	-
			29.0	27.2		YES*	4TW 2W	115
			26.1	25.4		YES*	4GG 3W	
			28.6	27.0		YES*	4TW 2W	230
			26.1	25.4		YES*	4GG 3W	
S4 7/07	0.75	11	18.4	7.3	1" 1/4		NO MOTOR	-
			32.2	30.5		YES*	4TW 2W	230
			29.7	28.7		YES*	4GG 3W	
S4 7/10	1	14	21.2	8.2	1" 1/4		NO MOTOR	-
			37.9	36.8		YES*	4TW 2W	230
			34.8	36.0		YES*	4GG 3W	
S4 7/15	1.5	19	25.8	9.9	1" 1/4		NO MOTOR	-
			44.4	42.5		YES*	4TW 2W	230
			41.2	42.3		YES*	4GG 3W	
S4 7/20	2	24	30.4	11.2	1" 1/4		NO MOTOR	-
S4 7/30	3	33	33.8	17.2	1" 1/4		NO MOTOR	-




PUMP MODEL	HP	PSI	Depth to pumping water in feet																		Shut-Off (ft)				
			20	40	60	80	100	120	140	160	180	200	240	260	300	360	400	480	500	600		700	800	900	1000
S4 7/05	1/2	0					11	10	10	9	8	7	5	3											
		20				10	9	9	8	7	5	3													
		30			10	9	8	7	7	6	3														
		40		10	9	8	7	7	5	3															
		50	10	9	8	7	5	3																	
		60	9	8	7	6	4																		
	80	7	6	5																					
	Shut-off PSI	114	105	97	88	79	71	62	53	45	36	19	10											123	
S4 7/07	3/4	0						11	10	10	10	8	7	6	3										
		20						10	10	10	9	8	7	6	3										
		30						10	10	9	9	8	7	6	4	2									
		40				10	10	9	9	8	7	7	3.5												
		50			10	10	9	8	7	7	6	5	3												
		60		10	10	9	8	7	7	6	5	4													
	80	10	9	8	8	7	6	5	4	3															
	Shut-off PSI	160	151	143	134	125	117	108	99	91	82	65	56	39	13									169	
S4 7/10	1	0								11	10	10	9	9	7	6	2								
		20								10	10	10	9	9	7	6	3								
		30								10	10	9	9	8	6	5	2								
		40						10	10	10	9	9	7	7	6	3									
		50						10	10	9	9	9	8	7	6	5									
		60				10	10	9	9	9	8	7	6	6	4										
	80			10	10	9	9	8	7	7	6	5	3												
	Shut-off PSI	209	200	191	183	174	165	157	148	139	131	113	105	87	62	44	10							217	
S4 7/15	1.5	0										11	10	10	9	9	7	4							
		20										11	10	10	9	9	8	6	5						
		30									10	10	10	9	9	8	7	5	4						
		40									10	10	10	10	9	9	8	7	4	3					
		50								10	10	10	10	9	9	8	7	6	4	3					
		60							10	10	10	10	9	9	8	8	7	6	3						
	80						10	10	10	10	9	9	8	8	7	5	4								
	Shut-off PSI	283	274	265	257	248	239	231	222	213	205	187	179	161	135	118	83	75	31				291		
S4 7/20	2	0													11	10	9	9	7	5	2				
		20													11	10	9	8	8	6	4				
		30													11	10	9	9	8	7	7	4			
		40												11	10	10	9	9	7	7	5	3			
		50										11	10	10	9	9	8	7	7	5	2				
		60										11	10	10	10	9	9	8	7	6	4				
	80									11	10	10	10	9	9	8	7	6	5	3					
	Shut-off PSI	364	356	347	338	330	321	312	304	295	286	269	261	243	217	200	165	157	113	70	27		373		
S4 7/30	3	0														10	10	10	9	8	7	6	4		
		20														10	10	10	10	9	8	7	5	3	
		30														10	10	10	10	9	9	8	6	3	
		40													10	10	10	10	10	9	9	8	7	5	
		50													10	10	10	10	10	9	9	8	7	4	
		60												10	10	10	10	10	10	9	9	8	7	5	
	80											10	10	10	10	10	9	9	9	8	7	6	3		
	Shut-off PSI	504	496	487	478	470	461	452	444	435	426	409	400	383	357	340	305	297	253	210	167	123	80		

* assembled version available with canned motor 4GG and 4TW
 NOTE: performances shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.



S47



4" SUBMERSIBLE ELECTRIC PUMPS

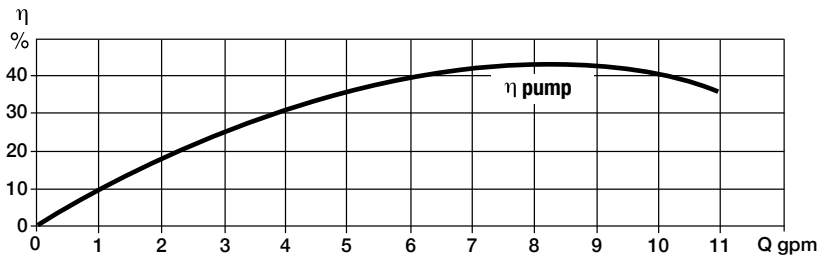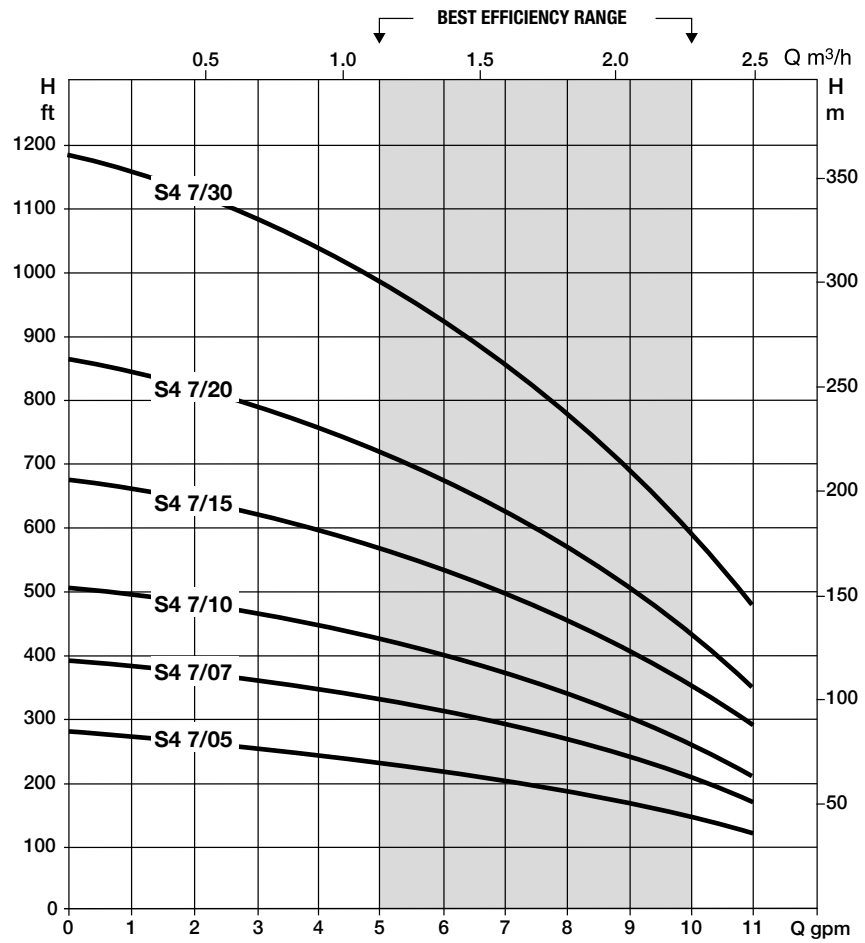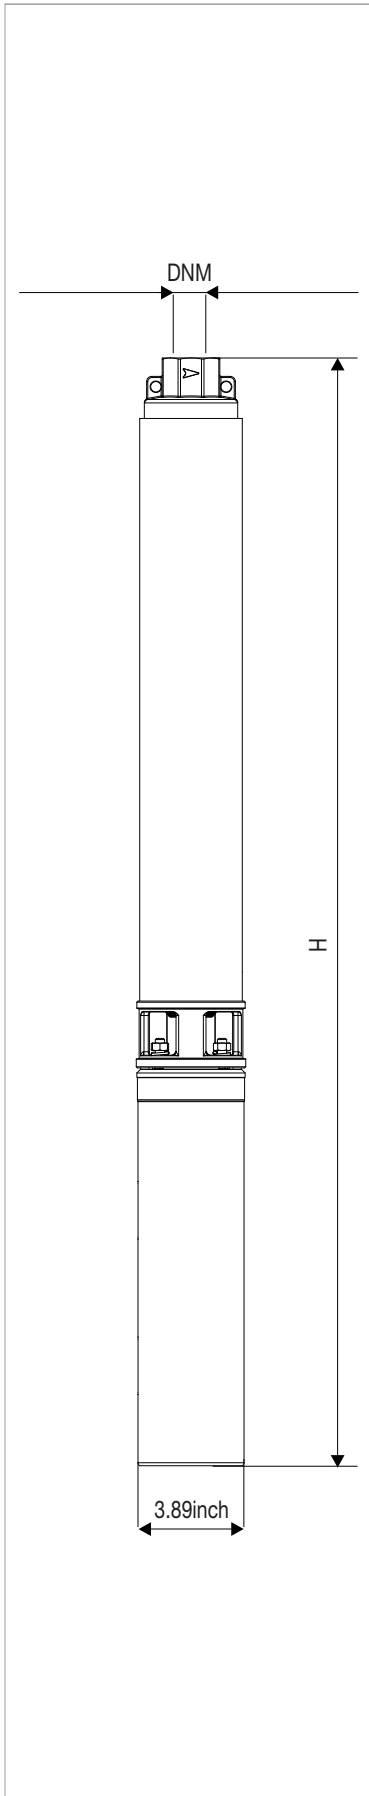

Curve tolerance according to ISO 9906

S4 10



4" SUBMERSIBLE ELECTRIC PUMPS

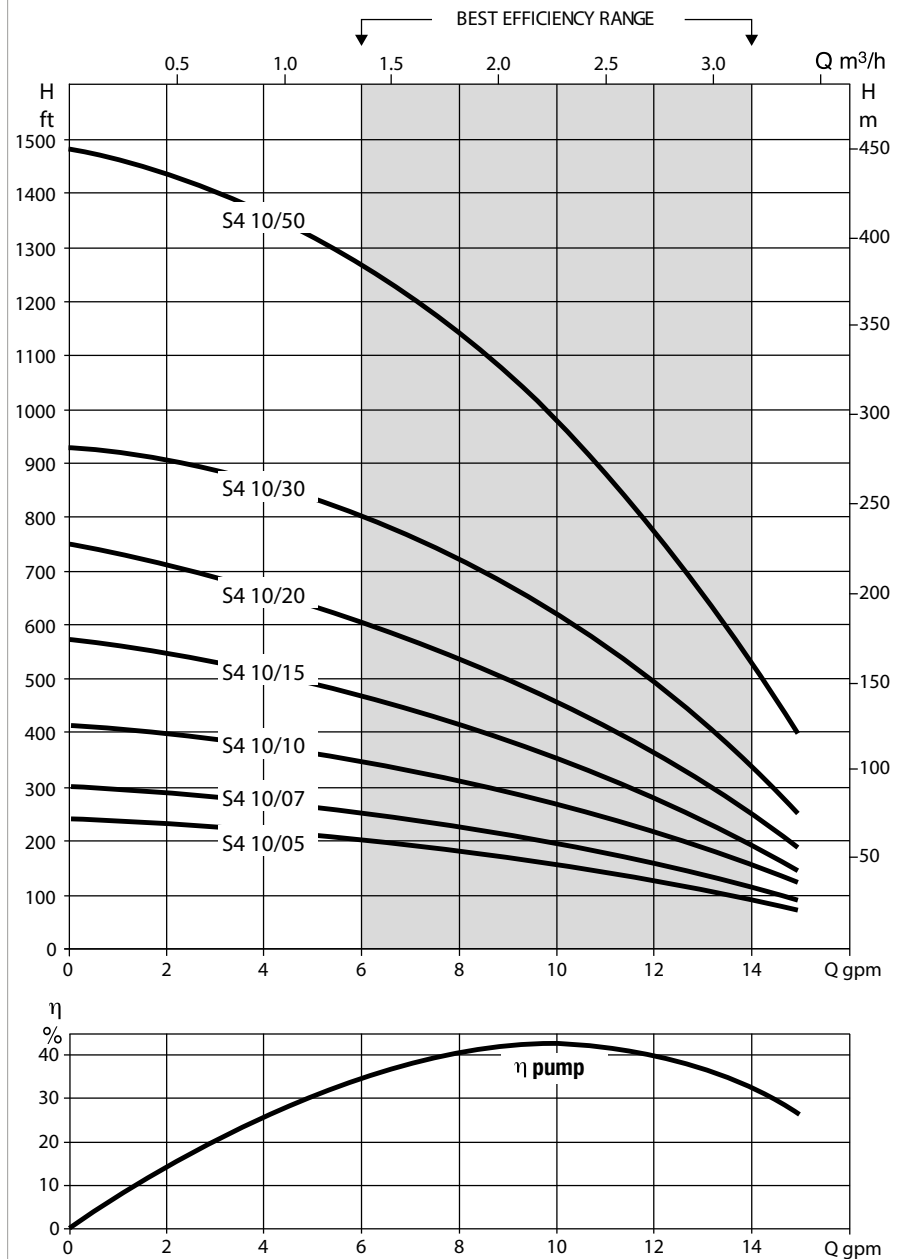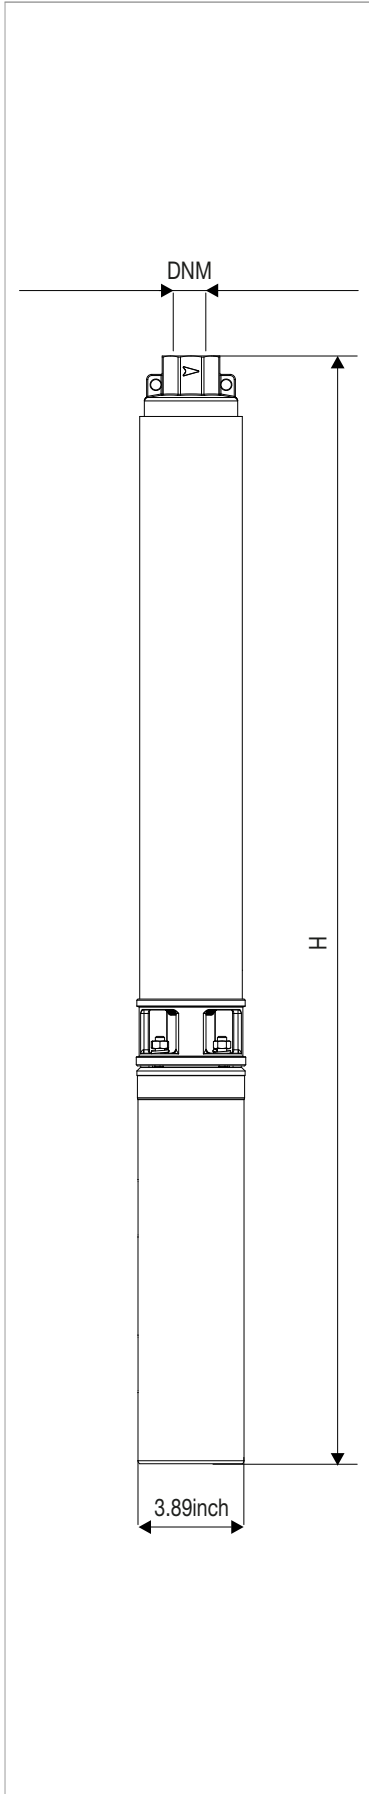

Curve tolerance according to ISO 9906

S4 15



4" SUBMERSIBLE ELECTRIC PUMPS

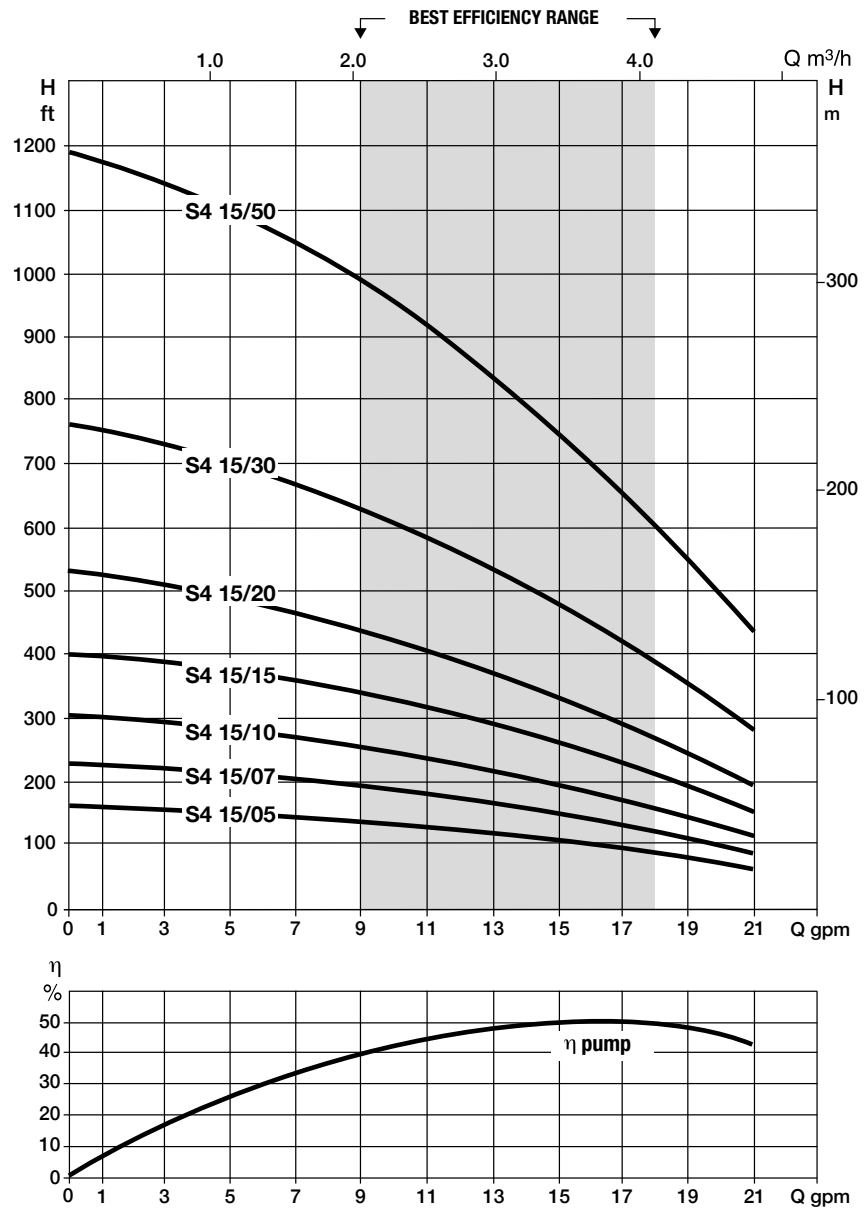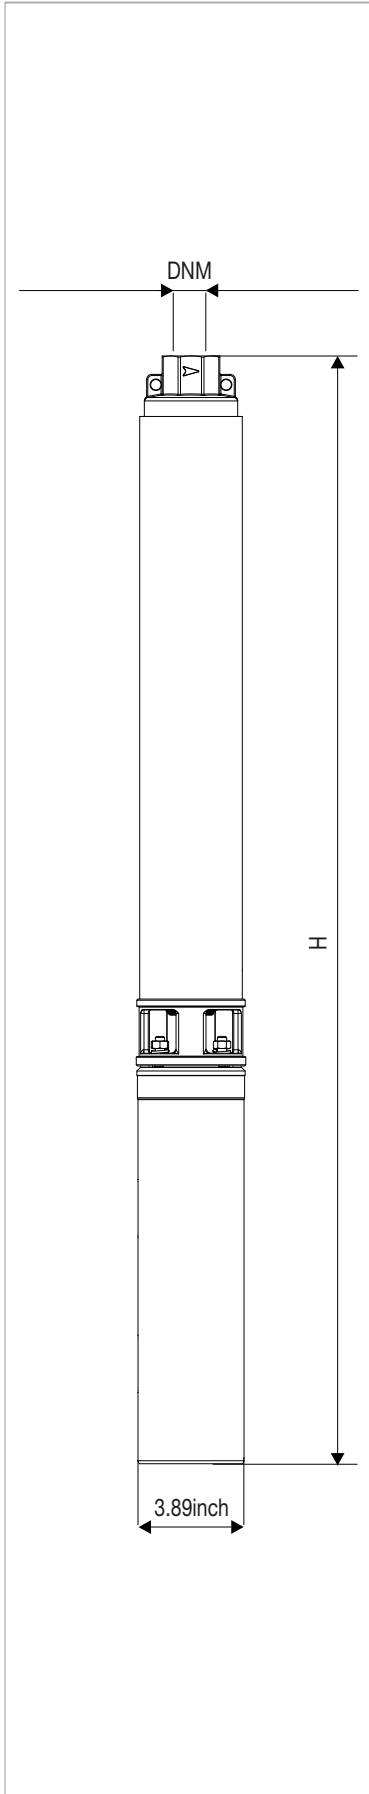

Curve tolerance according to ISO 9906

S4 20



4" SUBMERSIBLE ELECTRIC PUMPS

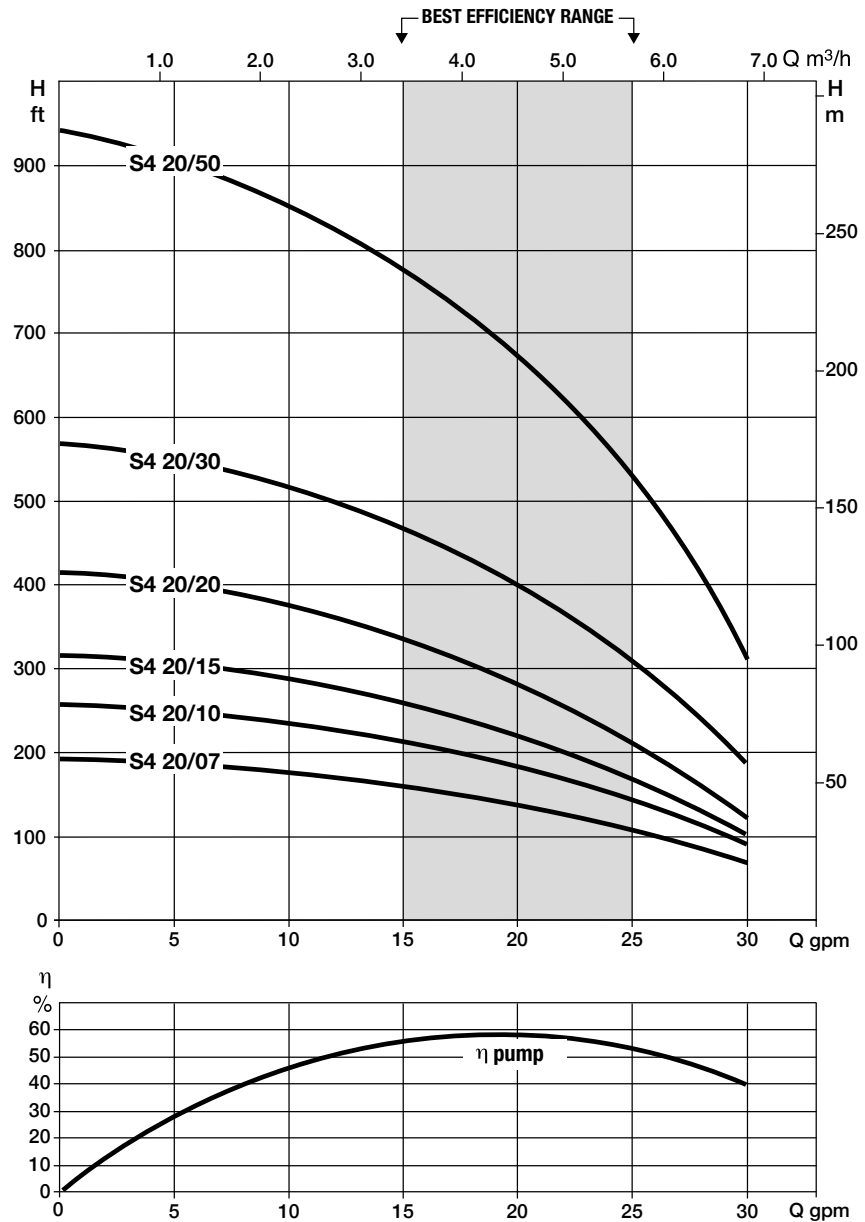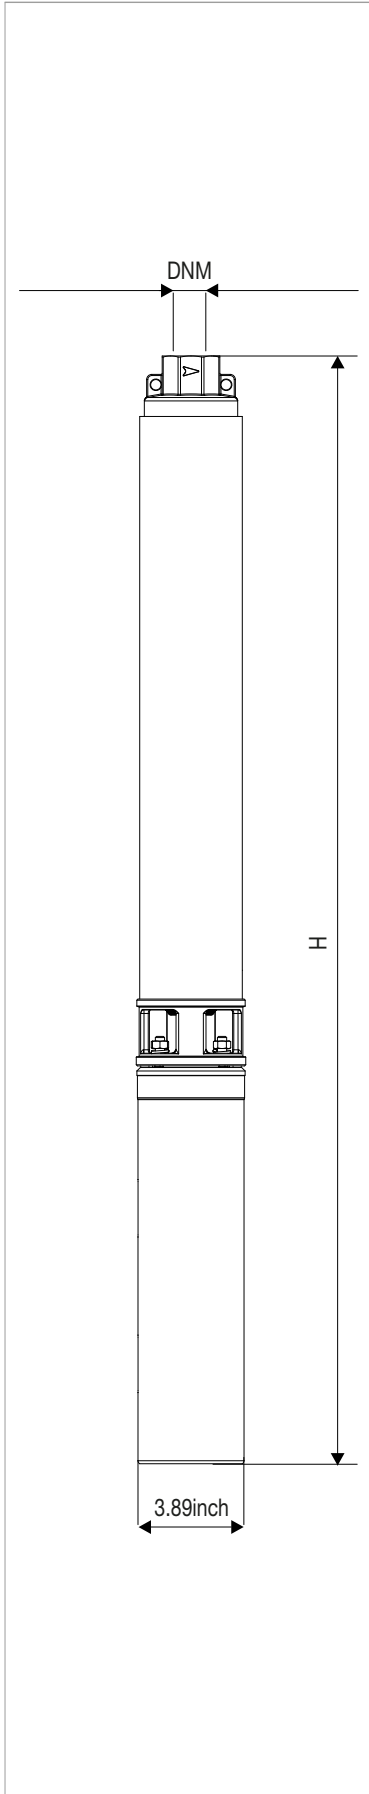

Curve tolerance according to ISO 9906

S4 25



4" SUBMERSIBLE ELECTRIC PUMPS

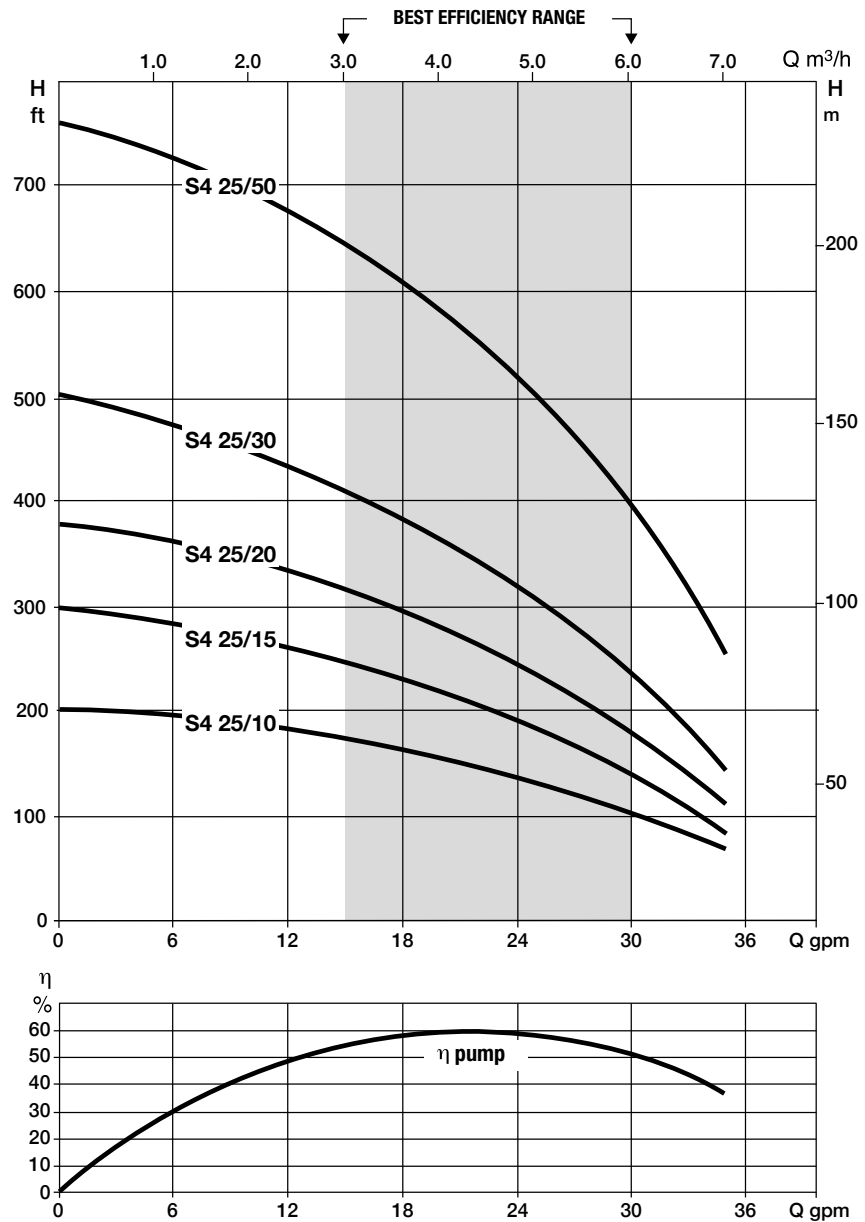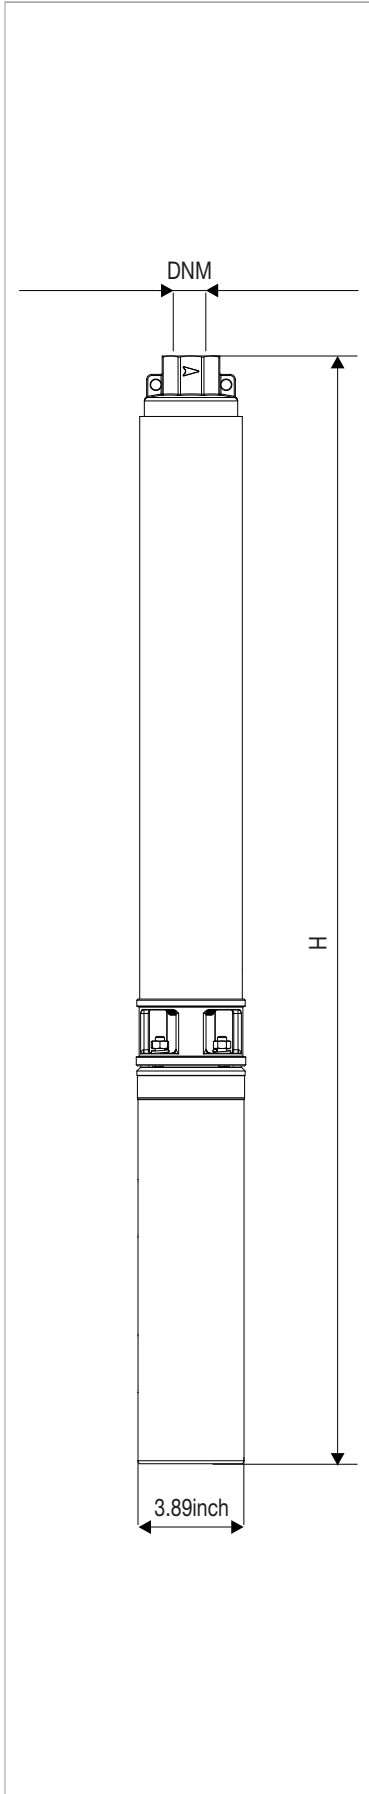

Curve tolerance according to ISO 9906

S4 35



4" SUBMERSIBLE ELECTRIC PUMPS

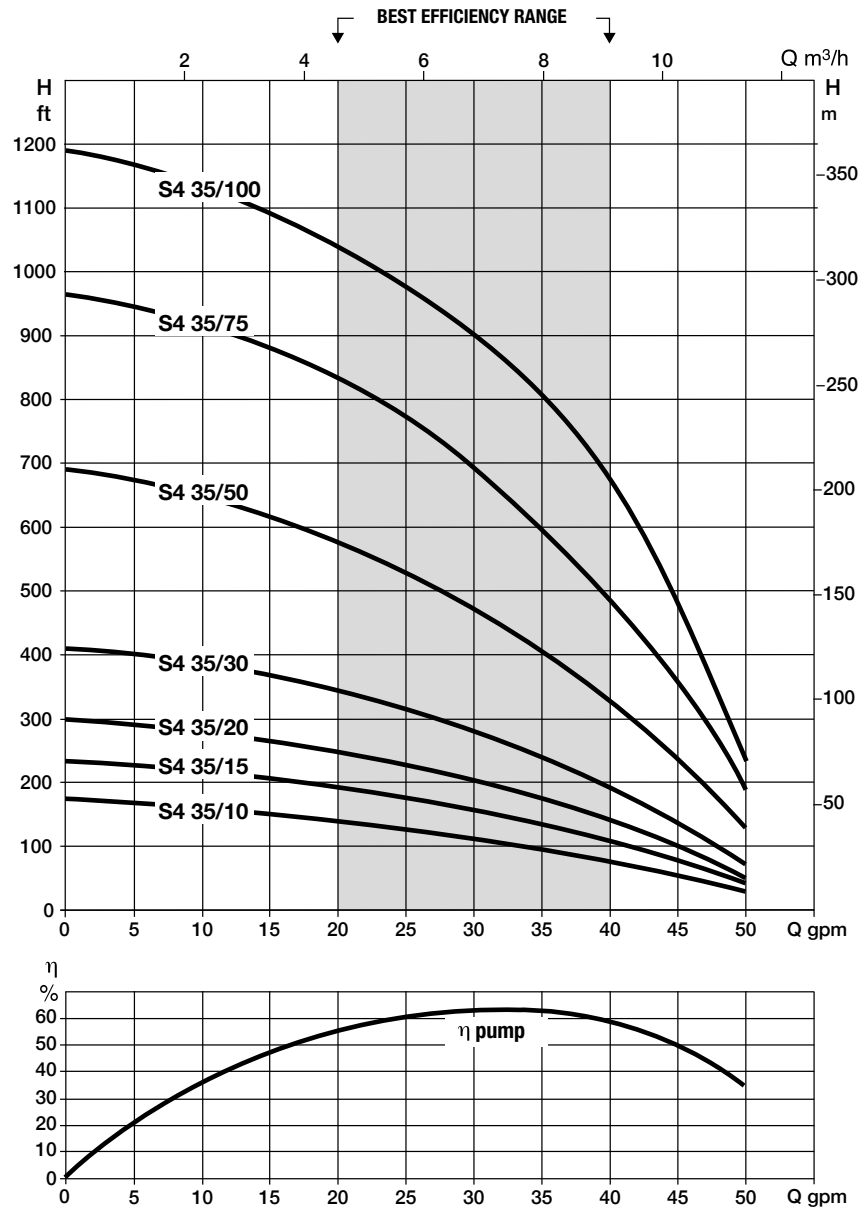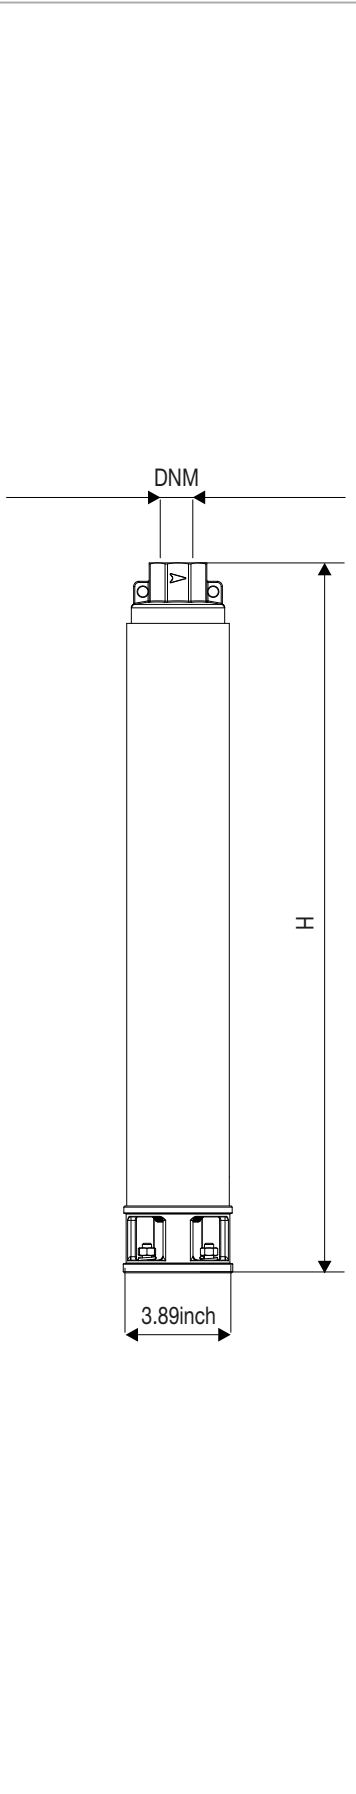

Curve tolerance according to ISO 9906

S4 45

4" SUBMERSIBLE ELECTRIC PUMPS

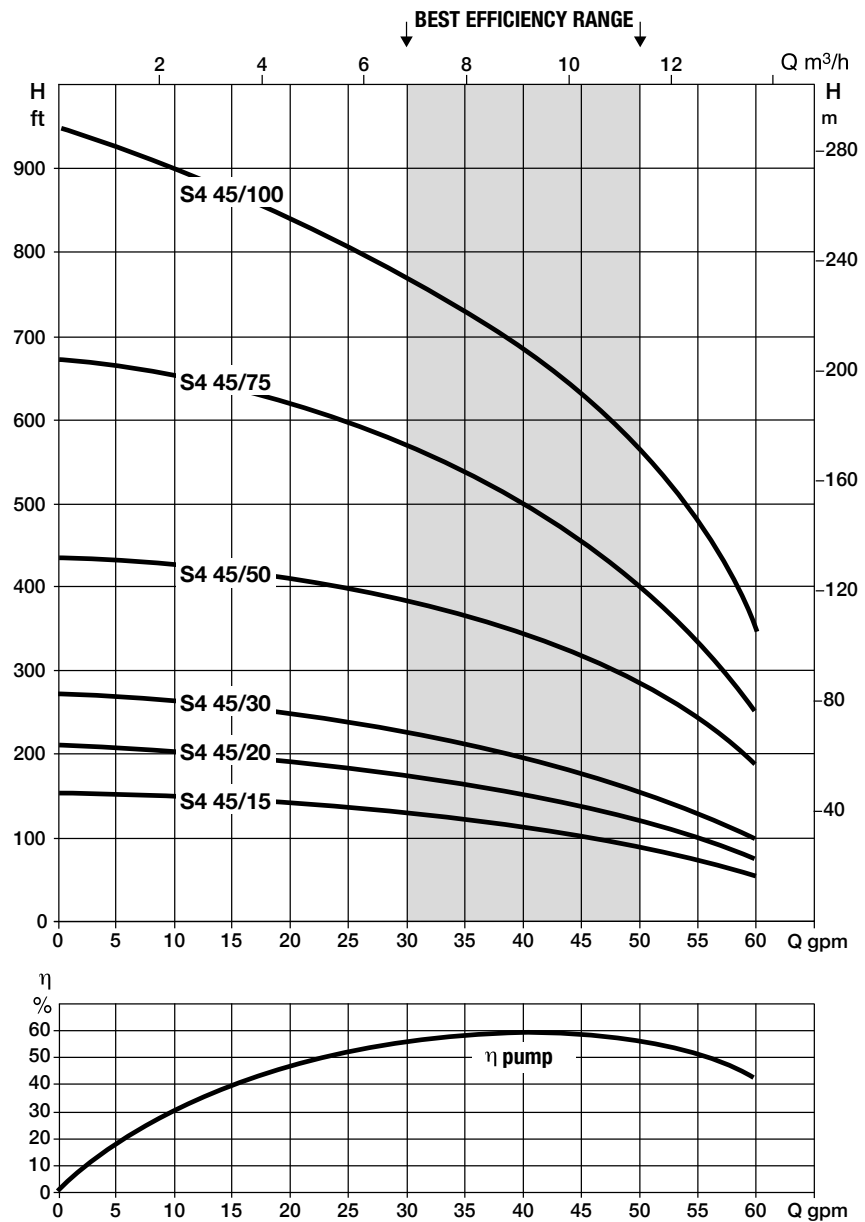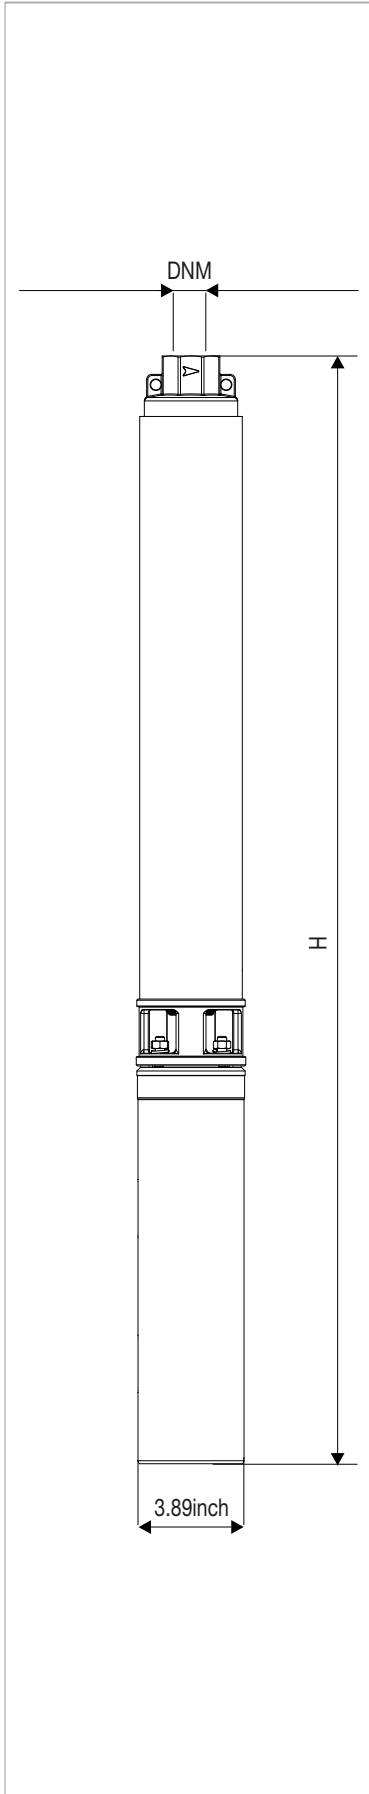

Curve tolerance according to ISO 9906

ELECTRICAL DATA AND DIMENSIONS

MODEL	P2 hp	STAGES	LENGHT inch	GROSS WEIGHT lbs	DISCHARGE SIZE npt	MOTOR TYPE
S4 60/20	2	6	21.0	9.7	2"	NO MOTOR
S4 60/30	3	8	25.1	11.5	2"	NO MOTOR
S4 60/50	5	13	34.3	16.1	2"	NO MOTOR
S4 60/75	7.5	17	44.0	21.4	2"	NO MOTOR
S4 60/100	10	23	56.2	28.7	2"	NO MOTOR



* assembled version available with canned motor 4GG and 4TW

PUMP MODEL	HP	PSI	Depth to pumping water in feet																				Shut-Off (ft)					
			20	40	60	80	100	120	140	160	180	200	240	260	300	360	400	480	500	600	700	800		900	1000	1100	1200	
S4 60/20	2	0	0			65	56	46	38	20																175		
		20	46		61	52	45	35	12																			
		30	69	60	50	42	30																					
		40	92	50	42	30																						
		50	116	40	24																							
		60	139	20																								
		80	185																									
		Shut-off PSI		67	58	50	41	32	24	15	6															76		
S4 60/30	3	0	0				70	63	56	48	42	32	20													235		
		20	46			68	62	54	46	40	30	12																
		30	69			66	60	52	46	38	28	10																
		40	92	66	60	52	46	38	28	10																		
		50	116	58	50	44	36	24																				
		60	139	48	42	34	20																					
		80	185	32	14																							
		Shut-off PSI		93	84	76	67	58	50	41	33	24	15	-2												102		
S4 60/50	5	0	0								75	72	70	66	58	52	44	24								393		
		20	46							72	68	64	60	56	46	42	30											
		30	69							70	68	64	60	55	50	42	36	18										
		40	92						70	68	64	60	55	50	46	36	28											
		50	116					70	68	62	58	54	48	44	40	26												
		60	139				70	66	64	62	52	48	44	40	32													
		80	185	64	60	54	50	46	42	40	32	22																
		Shut-off PSI		162	153	144	136	127	118	110	101	92	84	66	58	40	14									170		
S4 60/75	7.5	0	0									76	74	70	68	62	52	44	20							516		
		20	46									74	70	68	64	60	52	42	34									
		30	69									72	70	68	64	60	56	48	36									
		40	92								72	70	68	64	62	56	52	44	32									
		50	116							72	70	68	64	62	58	50	48	42	20									
		60	139						72	70	68	64	62	58	54	48	44	36	12									
		80	185				68	66	64	60	56	52	50	44	40	36	20											
		Shut-off PSI		215	206	197	189	180	171	163	154	145	137	119	111	93	67	50	16							223		
S4 60 /100	10	0	0											76	75	70	66	60	50	48	32					698		
		20	46											76	73	70	66	60	54	45	42	20						
		30	69											76	74	70	68	64	57	50	42	36	12					
		40	92											76	74	70	68	66	62	52	48	38	36					
		50	116											76	74	72	70	70	66	62	58	50	46	32	28			
		60	139											76	74	72	70	70	68	62	60	55	48	42	28	22		
		80	185										74	72	70	68	66	64	62	58	55	48	42	36	16			
		Shut-off PSI		293	285	276	267	259	250	241	233	224	215	198	189	172	146	129	94	86	42					302		

NOTE: performances shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage. Performance shown is based on a pump without check valve.

S4 60

4" SUBMERSIBLE ELECTRIC PUMPS

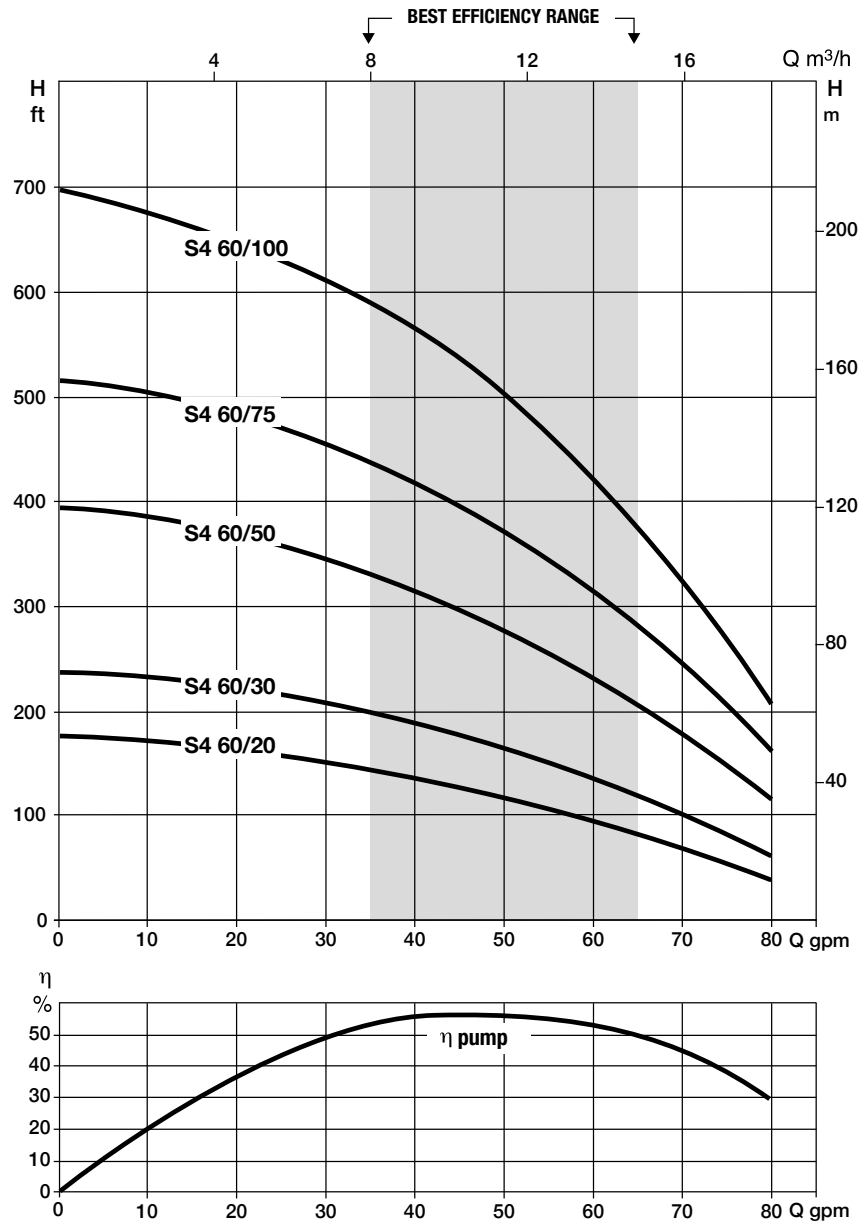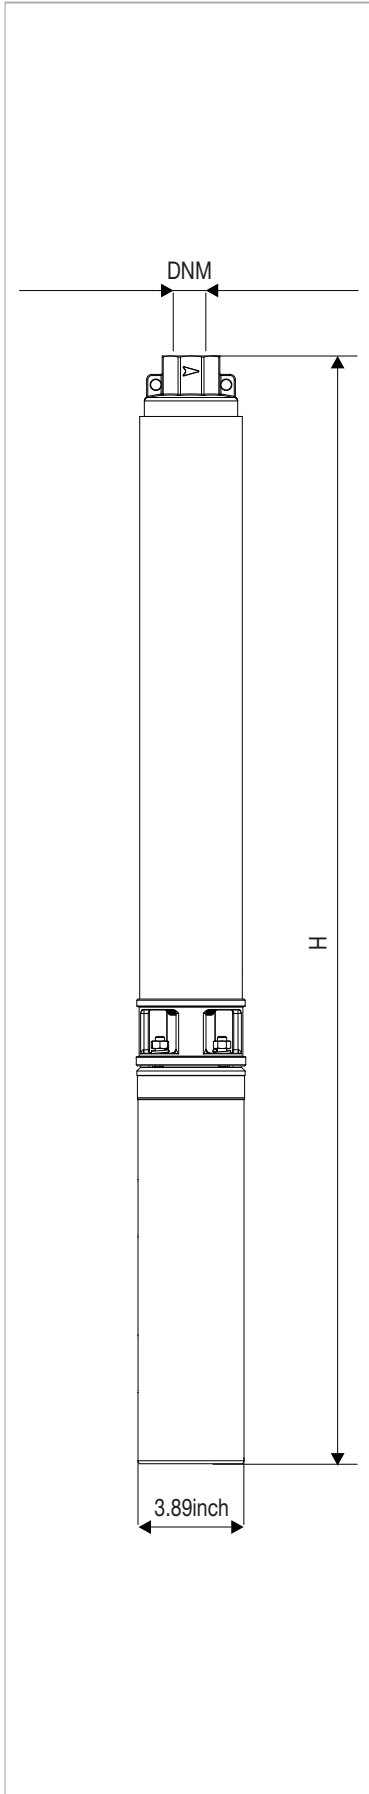

Curve tolerance according to ISO 9906

ELECTRICAL DATA AND DIMENSIONS

MODEL	P2 hp	STAGES	LENGHT inch	GROSS WEIGHT lbs	DISCHARGE SIZE npt	MOTOR TYPE
S4 90/20	2	5	22.1	9.7	2"	NO MOTOR
S4 90/30	3	6	24.8	10.8	2"	NO MOTOR
S4 90/50	5	10	34.5	17.2	2"	NO MOTOR
S4 90/75	7.5	14	46.7	22.7	2"	NO MOTOR
S4 90/100	10	19	60.1	28.9	2"	NO MOTOR



* assembled version available with canned motor 4GG and 4TW

PUMP MODEL	HP	PSI	Depth to pumping water in feet																					Shut-Off (ft)				
			20	40	60	80	100	120	140	160	180	200	240	260	300	360	400	480	500	600	700	800	900		1000	1100	1200	
S4 90/20	2	0	0	129	106	95	74	54	30																			140
		20	46	86	66	48	20																					
		30	69	64	44	16																						
		40	92	42	14																							
		50	116																									
		60	139																									
	80	185																										
	Shut-off PSI		52	43	34	26	17	9																			60	
S4 90/30	3	0	0		115	105	92	76	60	40	16																172	
		20	46	100	86	70	52	34																				
		30	69	84	68	50	30																					
		40	92	68	50	30																						
		50	116	46	20																							
		60	139	15																								
	80	185																										
	Shut-off PSI		66	57	48	40	31	22	14	5																74		
S4 90/50	5	0	0				112	106	100	92	84	75	66	46	34												300	
		20	46			104	98	90	82	68	62	54	42															
		30	69			102	96	90	80	70	62	50	40	26														
		40	92	102	96	90	80	70	62	50	40	26																
		50	116	94	86	78	68	58	48	36	20																	
		60	139	85	76	66	56	46	34	18																		
	80	185	64	54	44	30																						
	Shut-off PSI		121	112	104	95	86	78	69	60	52	43	26	17												130		
S4 90/75	7.5	0	0					114	110	105	100	94	88	76	68	54	26										404	
		20	46			114	108	102	98	92	86	80	62	58	52	34												
		30	69			112	108	102	98	92	86	80	72	64	50	42	20											
		40	92	112	108	102	98	92	86	80	72	64	50	42	20													
		50	116	108	100	94	90	84	76	70	62	54	46	30	16													
		60	139	100	94	90	82	76	70	60	54	46	36	16														
	80	185	86	80	74	66	58	52	44	34	24																	
	Shut-off PSI		166	157	149	140	131	123	114	105	97	88	71	62	45	19										175		
S4 90/100	10	0	0					122	120	116	112	108	104	96	92	84	66	54	30	20							543	
		20	46				118	114	110	106	102	98	94	86	82	70	52	40										
		30	69			118	114	110	106	102	98	94	90	80	74	62	46	32										
		40	92			118	114	110	106	102	98	94	90	86	76	70	58	40	24									
		50	116	118	114	110	106	100	96	92	88	82	80	68	62	50	30											
		60	139	112	108	104	100	96	92	88	82	78	72	60	54	44	20											
	80	185	102	98	94	90	86	82	74	70	64	56	46	42	26													
	Shut-off PSI		226	218	209	200	192	183	174	166	157	148	131	122	105	79	62	27	18							235		

NOTE: performances shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage. Performance shown is based on a pump without check valve.

S4 90

4" SUBMERSIBLE ELECTRIC PUMPS

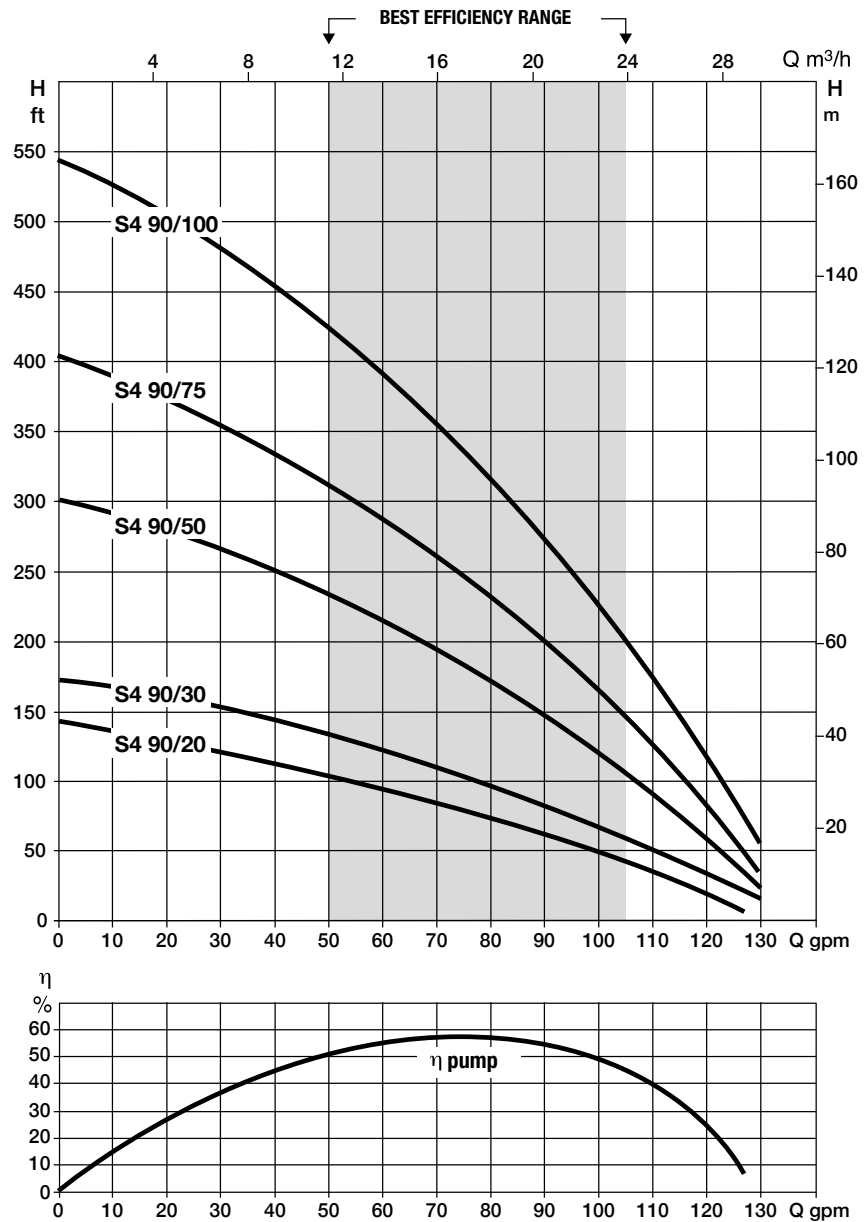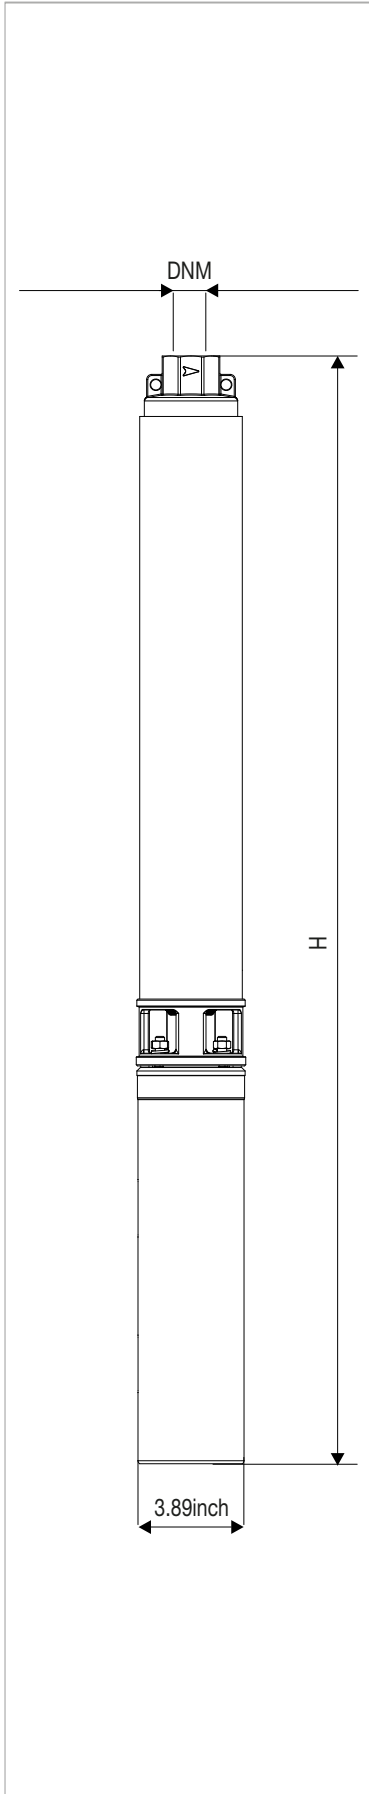

Curve tolerance according to ISO 9906

HYDRAULIC EFFICIENCY

US DOE,S PUMPS ENERGY CONSERVATION STANDARDS

GENERAL INFORMATION

The “S4” pumps are compliant with US DOE,s Pumps energy conservation standards:

- §431.462 Clean water pump
- §431.464 Test procedure for the measurement of energy efficiency, energy consumption, and other performance factors of pumps.
- §431.465 Pumps energy conservation standards and their compliance dates.
- §431.466 Pumps labeling requirements.

The testing and labelling is done by DAB as per the following test procedure, no certification body involvement required for USA.

Appendix A to Subpart Y of Part 431—Uniform Test Method for the Measurement of Energy Consumption of Pumps.

For more info: www.ecfr.gov

BEP US gpm	P2 kW	P2 HP	DAB Model (Pump End DAB)	STAGES	PEI pump end	PEI Hydraulic + 2W motor 230 V	PEI Hydraulic + 3W motor 230 V
25	0,75	1	S 25/10	7	0,98	1	0,98
	1,1	1,5	S 25/15	10	0,88	0,97	0,92
	1,5	2	S 25/20	13	0,87		
	2,2	3	S 25/30	17	0,93		
	3,7	5	S 25/50	26	0,9		
35	0,75	1	S 35/10	6	0,94		
	1,1	1,5	S 35/15	8	0,9		
	1,5	2	S 35/20	10	0,89		
	2,2	3	S 35/30	14	0,9		
	3,7	5	S 35/50	24	0,88		
	5,5	7,5	S 35/75	35	0,92		
	7,5	10	S 35/100	49	0,92		
45	1,1	1,5	S 45/15	5	0,98		
	1,5	2	S 45/20	7	0,96		
	2,2	3	S 45/30	9	0,97		
	3,7	5	S 45/50	14	0,92		
	5,5	7,5	S 45/75	22	0,94		
	7,5	10	S 45/100	30	0,94		
60	1,5	2	S 60/20	6	1		
	2,2	3	S 60/30	8	1		
	3,7	5	S 60/50	13	0,98		
	5,5	7,5	S 60/75	17	1		
	7,5	10	S 60/100	23	1		
90	1,5	2	S 90/20	5	1		
	2,2	3	S 90/30	6	1		
	3,7	5	S 90/50	10	1		
	5,5	7,5	S 90/75	14	1		
	7,5	10	S 90/100	19	0,96		

DNA
PUMPS SELECTOR

On-line product selection



DAB PUMPS LTD.

6 Gilberd Court
Newcomen Way
Severalls Business Park
Colchester
Essex
CO4 9WN - UK
salesuk@dwtgroup.com
Tel. +44 0333 777 5010



DAB PUMPS IBERICA S.L.

Calle Verano 18-20-22
28850 - Torrejón de Ardoz - Madrid
Spain
Info.spain@dwtgroup.com
Tel. +34 91 6569545
Fax: + 34 91 6569676



DAB PUMPS SOUTH AFRICA (PTY) LTD

Twenty One Industrial Estate,
16 Purlin Street, Unit B, Warehouse 4
Olifantsfontein -1666 - South Africa
info.sa@dwtgroup.com
Tel. +27 12 361 3997



DAB PUMPS BV

'tHofveld 6 C1
1702 Groot Bijgaarden - Belgium
info.belgium@dwtgroup.com
Tel. +32 2 4668353



DAB PUMPS HUNGARY KFT.

H-8800
Nagykanizsa, Buda Ernő u.5
Hungary
Tel. +36 93501700



DAB PUMPS (QINGDAO) CO. LTD.

No.40 Kaituo Road, Qingdao Economic & Technological
Development Zone
Qingdao City, Shandong Province - China
PC: 266500
sales.cn@dwtgroup.com
Tel. +86 400 186 8280
Fax +86 53286812210



DAB PUMPS POLAND Sp. z o.o.

Ul. Janka Muzykanta 60
02-188 Warszawa - Poland
polska@dabpumps.com.pl



DAB PUMPS B.V.

Albert Einsteinweg, 4
5151 DL Drunen - Nederland
info.netherlands@dwtgroup.com
Tel. +31 416 387280
Fax +31 416 387299



OOO DAB PUMPS

Novgorodskaya str. 1, block G
office 308, 127247, Moscow - Russia
info.russia@dwtgroup.com
Tel. +7 495 122 0035
Fax +7 495 122 0036



DAB PUMPS DE MÉXICO, S.A. DE C.V.

Av Amsterdam 101 Local 4
Col. Hipódromo Condesa,
Del. Cuauhtémoc CP 06170
Ciudad de México
Tel. +52 55 6719 0493



DAB PUMPEN DEUTSCHLAND GmbH

Tackweg 11
D - 47918 Tönisvorst - Germany
info.germany@dwtgroup.com
Tel. +49 2151 82136-0
Fax +49 2151 82136-36



DAB PUMPS INC.

3226 Benchmark Drive
Ladson, SC 29456 - USA
info.usa@dwtgroup.com
Tel. 1- 843-797-5002
Fax 1-843-797-3366



DAB PUMPS OCEANIA PTY LTD

426 South Gippsland Hwy,
Dandenong South VIC 3175 - Australia
info.oceania@dwtgroup.com
Tel. +61 1300 378 677