

SIMPLY RELIABLE



EUROINOX

THE STRONG SILENT TYPE.



EUROINOX MULTISTAGE CENTRIFUGAL PUMP

The EUROINOX is a multistage centrifugal electric pump that offers reliability and optimal hydraulic performance. This powerful pump can deliver pressures of up to 100 PSI and is designed to run exceptionally quietly. Eight models of the EUROINOX are available, ranging from 0.6 to 1.36 horsepower. All models are dual-voltage.

APPLICATIONS

EUROINOX is suitable for domestic use for water supply and pressurization, sprinklers & sprinkler systems, irrigation systems for vegetable gardens, and moving water in general.


FEATURES

- Pump body in stainless steel
- Self-Priming up to 26 feet of lift
- Built-in capacitor and single-phase version complete with thermal and current overload protection
- Dual-Voltage 115/230V Single Phase

ADVANTAGES

- Exceptionally quiet operation
- High pressures up to 100 PSI can be reached
- Optimal motor cooling
- Optimal hydraulic performance
- Reliable operation


**DESIGNED TO
RUN QUIETLY
WHILE DELIVERING
OPTIMAL HYDRAULIC
PERFORMANCE**

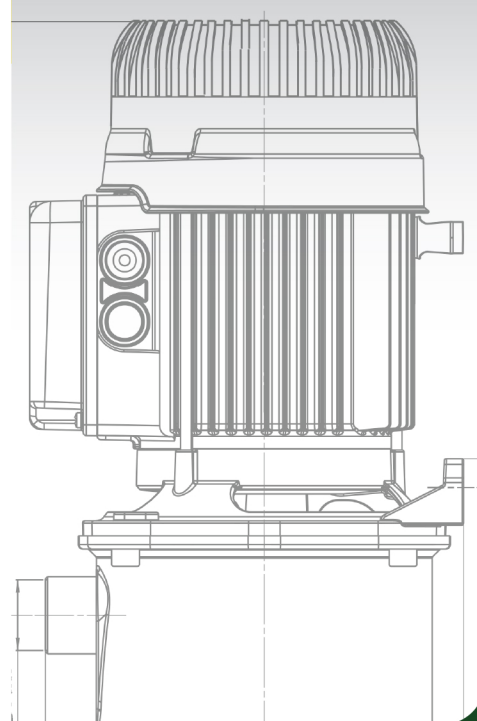

MORE INFORMATION

PUMP MODEL	CODE	P2 NOMINAL		Q=GPM	0	2.6	5.3	7.9	10.6	13.2	15.8	18.5	21.1	26.4	31.7
EUROINOX 30/506 M	60119514	0.55	0.75	Head (ft)	138	132		125	119	111	98	81	64	46	
EUROINOX 40/506 M	60119515	0.75	1		190	181	173	164	155	140	117	92	62		
EUROINOX 50/506 M	60119516	1	1.36		236	225	215	204	191	171	143	113	85		
EUROINOX 40/806 M	60119519	1	1.36		194		187	184	177	167	154	143	128	97	54

PERFORMANCE CURVES

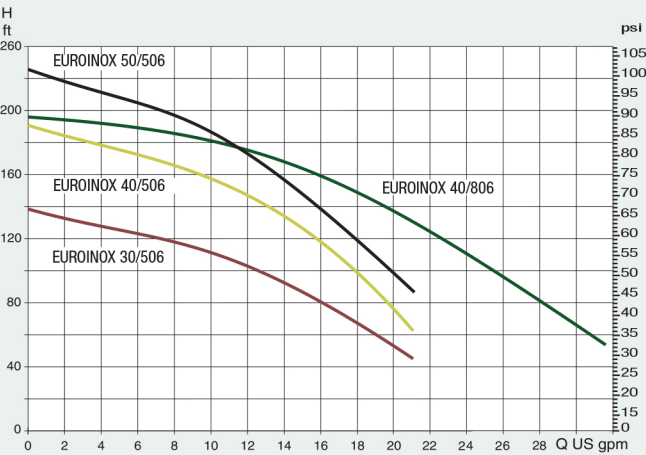

CERTIFICATIONS:



MORE BENEFITS AND DETAILS:



DABPUMPS.US



DAB PUMPS USA
3227 Benchmark Drive
Ladson, SC 29456 USA
service.us@dabpumps.com
Tel: 1-843-797-5002
Fax: 1-843-797-3366

MASCONTROL

CONTROL AND PROTECT
YOUR PUMP



MASCONTROL starts and stops the pump automatically, responding to opening and closing of the taps. In the event of interrupted water supply, MASCONTROL protects your pump from dry running.

FEATURES

- Automatic restart
- Anti-jamming function
- Low Maintenance
- 1-1/4 inch male connection guarantees high flow rate
- Dual-Voltage 115/230V



MASCONTROL MODEL	CODE
MCDV232101 1" 32 PSI	109640410
MCDV242101 1" 44 PSI	109640420
MCDV232114 1-1/4" 32 PSI	109640450
MCDV242114 1-1/4" 44 PSI	109640460

CONSULT YOUR LOCAL DAB DISTRIBUTOR