


SURFACE PUMPS

JET PS • JETCOM • EUROINOX

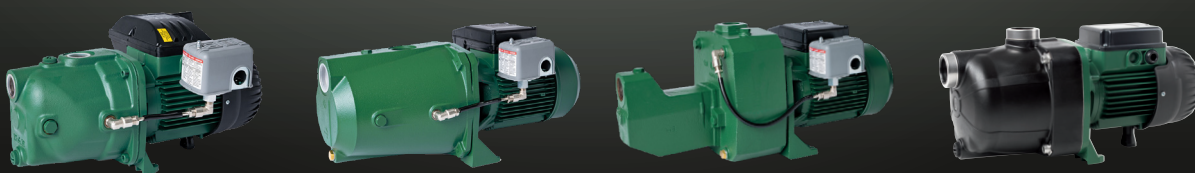

DAB®

JET PS



CAST IRON SELF-PRIMING PUMP

FOR SUCTION LIFT FROM WELLS OR TANKS

The JET PS pump features a cast iron body and integrated ejector for reliable self-priming up to 29 feet, making it ideal for wells, tanks, and other residential applications requiring suction lift.

FEATURES & ADVANTAGES

- Durable cast iron construction
- Integrated pressure switch for automatic control
- Self-priming up to 29 feet
- Handles air in suction lines without losing prime
- Built-in thermal overload protection
- Reliable in tough environments
- Available in 115V or 230V
- For potable water or other clean, non-corrosive liquids

APPLICATIONS

- Domestic water supply
- Small-scale agriculture
- Gardening and irrigation
- Any clean water installation requiring self-priming operation

JETCOM



TECHNO-POLYMER SELF-PRIMING PUMP

FOR WATER SUPPLY IN DOMESTIC INSTALLATION

The JETCOM features a lightweight, corrosion-resistant techno-polymer body, making it ideal for residential pressure boosting, small to medium irrigation systems, and gardening applications.

FEATURES & ADVANTAGES

- Lightweight techno-polymer body
- Corrosion resistant
- Quiet, compact design
- Self-priming up to 26 feet
- Built-in thermal overload protection
- Dual-voltage motor (115V/230V)
- For potable water or other clean, non-corrosive liquids

APPLICATIONS

- Domestic water supply
- Small-scale agriculture
- Gardening and irrigation
- Any clean water installation requiring self-priming operation

Model	Pallet Qty	P2 Nominal kW	HP	GPM	0	2.6	5.3	7.9	10.6	13.2	15.8	18.5	21.1	26.4	31.7	Compares to:
JET 50-PS	18	.37	.5	Head (ft / PSI)	154 / 67	131 / 57	112 / 49	98 / 43	86 / 37	77 / 33	67 / 29					Gould J5S - JRS5, Little Giant JP-050 C, Myers HJ50S, Myers QD50S, Sta-Rite HNC
JET 75-1-PS	18	.56	.75		119 / 52	110 / 48	102 / 44	93 / 40	85 / 37	79 / 34	72 / 31	64 / 28	56 / 24			Goulds JRS7, Little Giant JP-075 C, Myers HJ75S, Myers QD75S, Sta-Rite HND
JET 100-1-PS	18	.75	1		158 / 69	150 / 65	140 / 61	131 / 57	123 / 53	115 / 50	107 / 47	98 / 43	89 / 39			Goulds JRS10, Little Giant JP-100 C, Myers HJ100S, Myers QD100S, Sta-Rite HNE
JET 150-PS	6	1.1	1.5		200 / 87	191 / 83	184 / 80	174 / 76	164 / 71	151 / 66	141 / 61	118 / 51				Grundfos JP15S-CI, Pearl JCC, Sta-Rite SNF
JET 200-PS	6	1.5	2		203 / 88	197 / 86	190 / 83	184 / 80	177 / 77	167 / 73	159 / 69	151 / 66	143 / 62	128 / 56	112 / 49	Grundfos JP20S-CI
JET 300-PS	6	2.2	3		168 / 73	164 / 71	160 / 70	157 / 68	153 / 67	149 / 65	146 / 63	142 / 62	137 / 60	130 / 57	121 / 53	Grundfos JP30S-CI
JETCOM 62 M	28	.44	.6		139 / 60	113 / 49	94 / 41	80 / 35	68 / 30	43 / 19						Grundfos JPC 3-42
JETCOM 82 M	28	.5	.8		154 / 67	131 / 57	112 / 49	98 / 43	86 / 37	77 / 33	66 / 29					Grundfos JPC 4-47, Flotech 4012
JETCOM 102 M	28	.75	1		177 / 77	154 / 67	135 / 59	119 / 52	106 / 46	94 / 41	85 / 37					Grundfos JPC 4-54, Flotech 4022, Sta-Rite PND
JETCOM 132 M	28	1	1.36		158 / 69	150 / 65	140 / 61	131 / 57	123 / 53	115 / 50	107 / 47	98 / 43	89 / 39			Grundfos JPC 5-48, Flotech 4032, Sta-Rite PNE

EUROINOX



MULTISTAGE HORIZONTAL CENTRIFUGAL PUMP

FOR PRESSURE BOOSTING

The EUROINOX features a stainless-steel pump body and ultra-quiet operation, making it ideal for domestic water supply, pressure boosting, and irrigation of plant and vegetable gardens.

FEATURES & ADVANTAGES

- Stainless-steel pump body
- Exceptionally quiet operation
- Dual-voltage motor (115V/230V)
- Built-in thermal and current overload protection
- Optimized motor cooling and hydraulic performance
- Reliable long-term operation

APPLICATIONS

- Domestic water supply and pressurization
- Sprinkler and sprinkler systems
- Gardening and irrigation

MASCONTROL



ELECTRONIC PUMP CONTROLLER

COMPATIBLE WITH JET, JETCOM, EUROINOX

MASCONTROL monitors both pressure and flow to automatically control pump operation. It offers complete run-dry protection and eliminates the need for large expansion tanks.

FEATURES & ADVANTAGES

- Compatible with all fixed-speed pumps (up to 16 amps)
- Automatically starts/stops pump based on demand
- Built-in dry run protection with auto reset
- Dual-voltage motor (115V/230V)
- Eliminates the use of large expansion tanks
- Absorbs water hammer
- Compact and easy to install
- Suitable for both surface and submersible pumps

APPLICATIONS

- Residential and commercial well systems
- Water conditioning irrigation
- Pressure booster systems

Model	Pallet Qty	P2 Nominal		GPM	0	2.6	5.3	7.9	10.6	13.2	15.8	18.5	21.1	26.4	31.7	Compares to (when installed with MASCONTROL):
		kW	HP													
EUROINOX 30/506 M	28	0.5	0.75	Head (ft / PSI)	138 / 60	132 / 57		125 / 54	119 / 52	111 / 48	98 / 43	81 / 35	64 / 28	46 / 20		Grundfos SCALA 1 3-45, Davey Bit 14-45, Walrus Pump HQ800H, F&W VP05
EUROINOX 40/506 M	28	0.8	1.1		190 / 83	181 / 79	173 / 75	164 / 71	155 / 67	140 / 61	117 / 51	92 / 40	62 / 27			F&W VP10, Davey Bit 20-40
EUROINOX 50/506 M	28	1	1.36		236 / 103	225 / 98	215 / 93	204 / 89	191 / 83	171 / 74	143 / 62	113 / 49	85 / 37			F&W VP10
EUROINOX 40/806 M	28	1.1	1.36		194 / 84		187 / 81	184 / 80	177 / 77	167 / 73	154 / 67	143 / 62	128 / 56	97 / 42	54 / 23	Grundfos SCALA 1 5-55



DABPUMPS.US

DAB PUMPS, INC.

3226 Benchmark Drive

Ladson, SC 29456

service.us@dabpumps.com | (843) 797-5002