DAB

MAKING WATER EASY

esybox DIVER 60Hz

7” ELECTRONIC MULTISTAGE SUBMERSIBLE PUMPS WITH INVERTER


US VERSION



PERFORMANCE RANGE

The performance curves are based on kinematic viscosity values = 1 mm^2/s and a density of 1000 kg/m^3. Curve tolerance to ISO 9906.

SELECTION GUIDE GRAPH

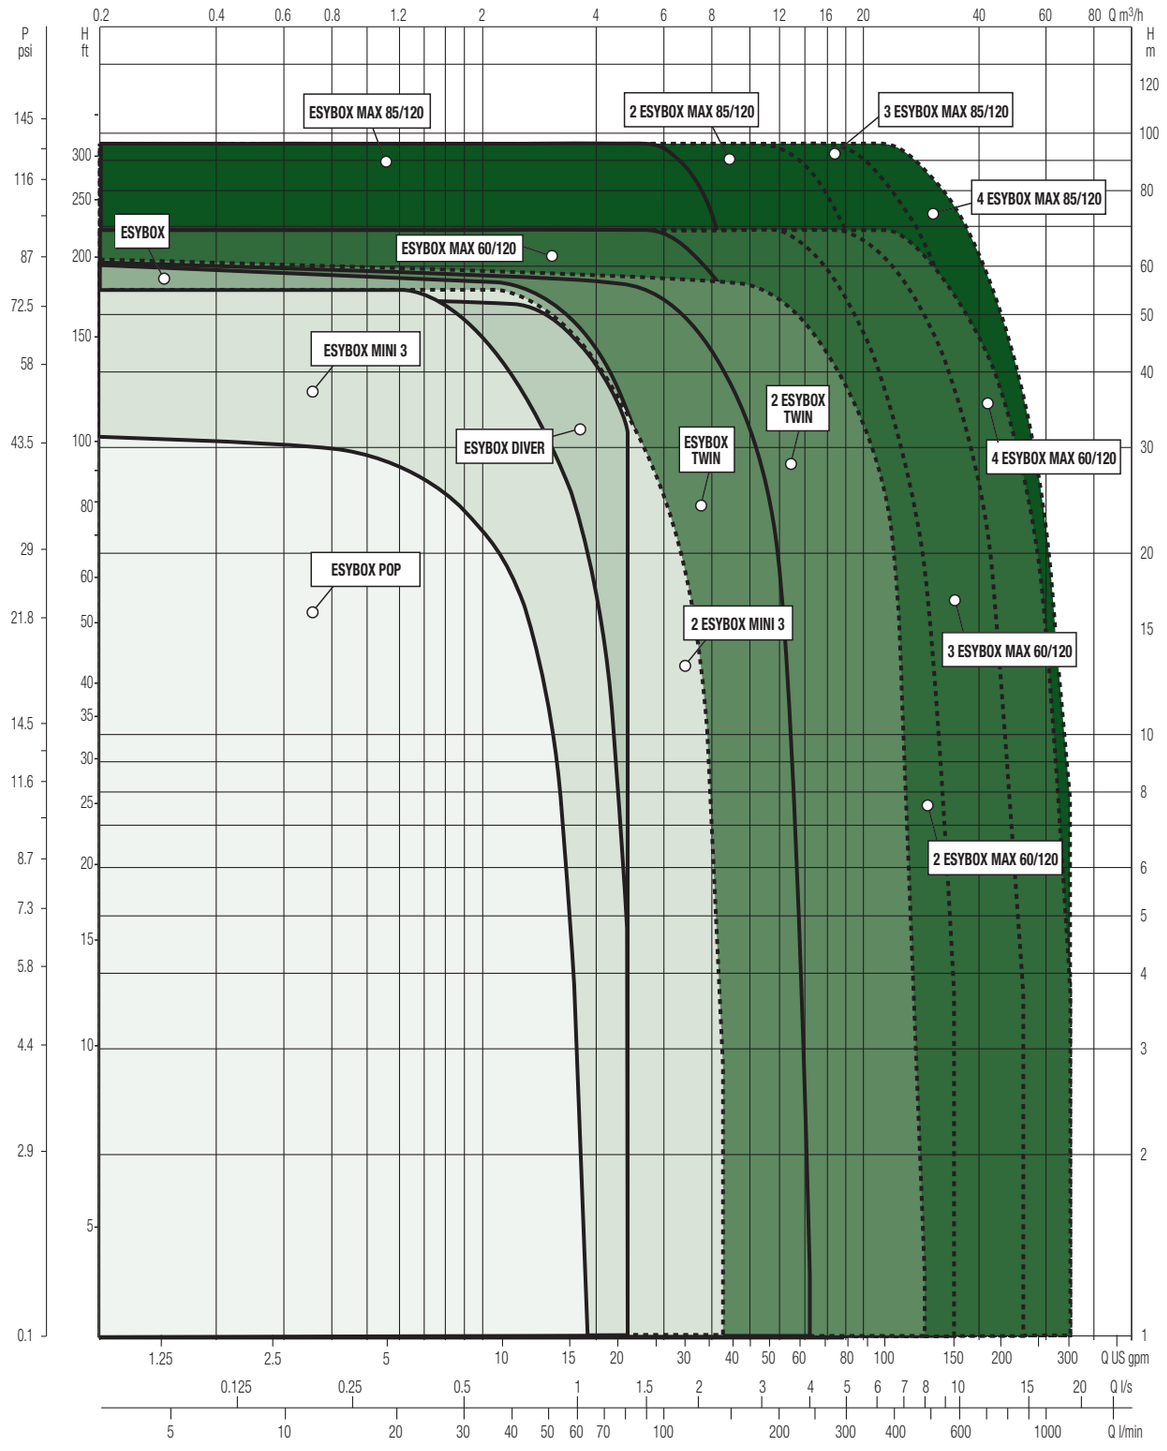

ESYBOX DIVER

7” ELECTRONIC MULTISTAGE SUBMERSIBLE PUMPS WITH INVERTER

REMOTE MONITORING
Via web portal
and H2D App

FOR PROFESSIONALS
AND END USERS



TECHNICAL DATA

Flow rate maximum: 31.7 GPM
Head up to: 180 ft
Maximum immersion depth: 39 ft standard version
Type of pumped liquid: Water Clean, free from solid or abrasive substances, non-viscous, non-aggressive, non-crystallized and chemically neutral
Free passage: 0.1 in
Minimum suction depth: 4 in
Minimum level of water: 1 in
Liquid temperature range: from +32°F to +122°F
Minimum and maximum ambient temperature: <+32°F / +122°F
Maximum immersion depth: 49 ft
Adjustable constant pressure: pre-set 43.5 psi, adjustable from 14.5 to 79.8 psi
Outlet connection: Threated 1” 1/4
Pump maximum diameter: 7.3 in
Set cut-in: 35 psi (+-3)
Impeller/s material:
Technopolymer with ring impeller in AISI 304 stainless steel
Maximum number of starts: 60/h
Protection class: IP 68
Non-stop service: yes
Motor insulation class: F
Power cable (m) and plug: 49.2 ft with plug
Single phase power input: 1 x 220-240 V ~ / 60 Hz
Possible type of installation: Fixed, horizontal or vertical. Submerged or semi-submerged. It can be installed on the surface, with positive suction, in a vertical position with the DOC68 accessory (supplied separately).
Special versions on request:
X version with suction kit for suction at a higher level.
Version for drinking water WRAS, ACS, NSF.
Surface version (the DOC68 accessory is required).
Certification:
WRAS, ACS, NSF (only model for drinking water) are pending approval, CSA & UL.

7” multi-stage electronic pump with variable speed drive for clean water designed for use in wells, cisterns or tanks. The pump can be used submerged, partially submerged or on the surface (with the appropriate accessory). It is suitable for pressurization, reuse of rainwater, gardening activities and irrigation in residential building service. The pump can also be installed horizontally. Equipped with PLC (PowerLine Communication) and Wi-Fi technology. DConnect Box 2 supplied as standard. There is an X version with 1” union and kit X which includes 3.3 feet suction pipe and float to prevent the suction of impurities from the bottom. The entire pump is IP 68 certified. With the DOC68 accessory (supplied separately) the pump becomes an IP 68 surface pump to be used in positive suction. Certified version for drinking water available on request. (Requires a small external pressure tank.)

CONSTRUCTION FEATURES OF THE PUMP

Technopolymer pump body to resist corrosion and oxidation. Integrated non-return valve. Integrated debris filter. Overpressure valve, in case of completely submerged installation, with the freezing of the water in the external pipes, the valve prevents the damage to the pump. On the pump body there is a air-vent valve that improves priming during the first installation or in the event of emptying the tank/well, and a stainless steel handle to move the pump. Integrated 0.01 gal expansion vessel sized to prevent the pump from cycling in the event of small leaks and to compensate for water hammer. No maintenance or recharging is required. The coupling between the three impellers in technopolymer, the floating ring and the smoothing disc both in stainless steel allow a limited wear of the hydraulics and a more precise alignment of the components. Suction height can be adjusted using the appropriate accessory (included): 1, 1.6, 2.4 or 3.1 in.

CONSTRUCTION FEATURES OF THE MOTOR

High efficiency permanent magnet submersible motor cooled by the pumped liquid. hydraulic side of the motor shaft in AISI 303 stainless steel. Double mechanical seal in oil chamber where the seal on the motor side is subjected only to submersible pressure (14.5 psi), while the other side is subjected to operating pressure (up to 80 psi) ensuring that the pump is watertight. Electronically protected motor. Quick coupling/release cable to facilitate installation inside tanks or cisterns. Tear-off power cable connection.

FEATURES OF THE ELECTRONIC


The electronic operation allows the pump to start and stop autonomously Variable speed drive for operation according to the system requirements. Working pressure adjustable from 15 to 80 psi and protects against dry running. NFC (Near Field Communication) pocket for the use of a float sensor (supplied separately) which can be connected without opening the pump maintaining a watertight seal. Thanks to the PLC communication technology, the pump transmits data through the power cable to the DConnect Box 2.


DCONNECT BOX 2

Thanks to the DConnect Box 2 and the H2D service it is possible to check and manage the system pressure, alarms and the amount of residual water in the tank directly from your smartphone or tablet. DConnect Box 2 supplied as standard.

ESYBOX DIVER

7” ELECTRONIC MULTISTAGE SUBMERSIBLE PUMPS WITH INVERTER

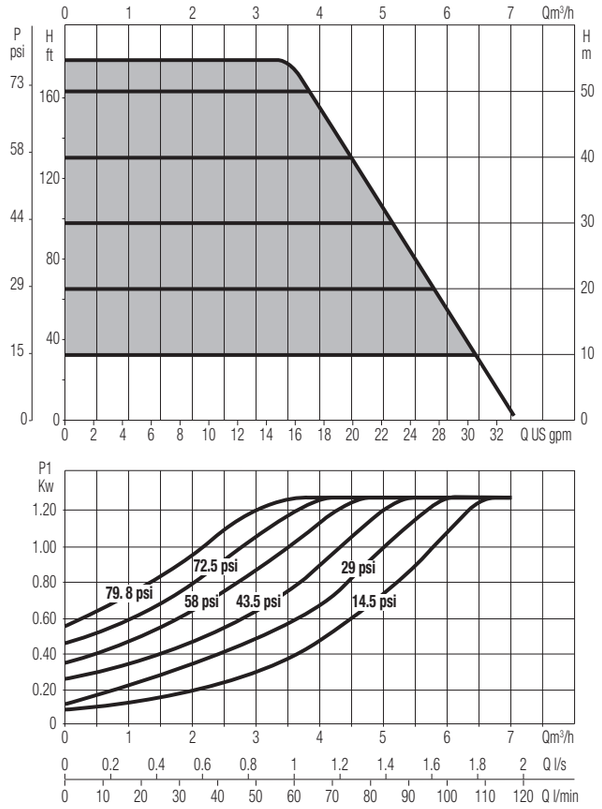

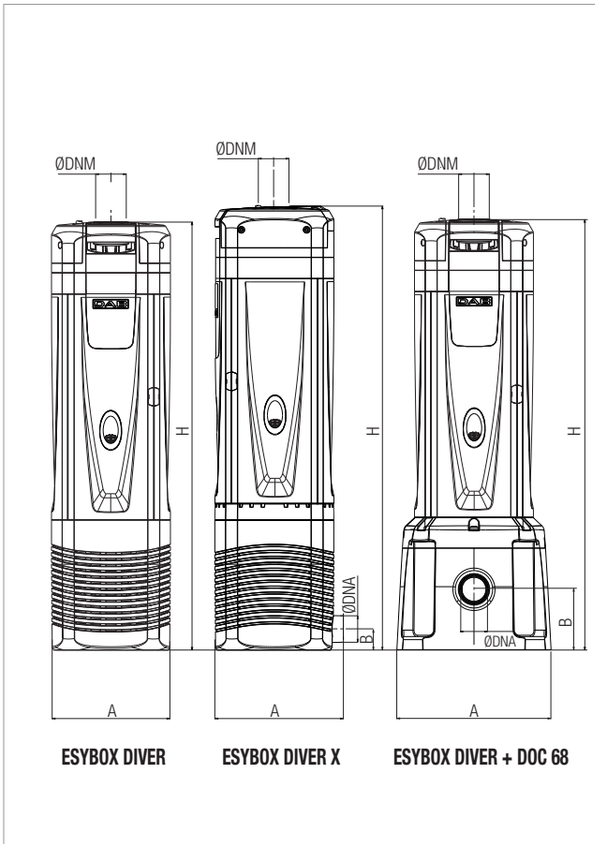

The performance curves are based on kinematic viscosity values = 1 mm²/s
and density equivalent to 1000 kg/m3. Curve tolerance according to ISO 9906.

MODEL	HYDRAULIC DATA												
	Q=GPM	0	2.6	5.3	7.9	10.6	13.2	15.8	18.5	21.1	23.8	26.4	29	31
ESYBOX DIVER	H (ft)	180	180	180	180	180	180	174	144	112	85	56	25	2.1
ESYBOX DIVER X	H (ft)	180	180	180	180	180	180	174	144	112	85	56	25	2.1
ESYBOX DIVER + DOC 68	H (ft)	180	180	180	180	180	180	174	144	112	85	56	25	2.1

MODEL	ELECTRICAL DATA					A	B	H	Ø DNM	DNA	PACKING DIMENSIONS			PACKING VOLUME	Q.TY X PALLET	WEIGHT
	POWER INPUT 60 Hz	P1 kW	P2 NOMINAL		In A						L/A	L/B	H			
			kW	HP												
ESYBOX DIVER	1 x 220-240 V ~	1.3	0.95	1.3	5.5	7.3	-	7.3	1" 1/4	-	29.1	9.1	11.8	1.8 ft³	15	37.5 lbs
ESYBOX DIVER X	1 x 220-240 V ~	1.3	0.95	1.3	5.5	7.3	7.3	26.6	1" 1/4	1"	30.7	9.1	11.8	1.9 ft³	15	37.5 lbs
ESYBOX DIVER + DOC 68	1 x 220-240 V ~	1.3	0.95	1.3	5.5	9.3	3.6	25.9	1" 1/4	1" 1/4	15*	12*	7*	0.7 ft³*	30*	6.6 lbs*

* Data referred to the DOC68 accessory only


H_2D DIGITAL SERVICE

THE SMART PLATFORM FOR MANAGING DAB DEVICES REMOTELY

H_2D IS THE DAB PLATFORM — COMING IN A MOBILE AND DESKTOP VERSION — THAT PAIRS WITH LATEST GENERATION DAB DEVICES TO SHOW YOU WHAT'S GOING ON INSIDE SYSTEMS.

It allows you to configure your pump and optimize its operation remotely, saving time, resources and money.

Ideal for anyone seeking to future-proof their business with solutions designed to improve processes, offer more service, and be environmentally responsible.

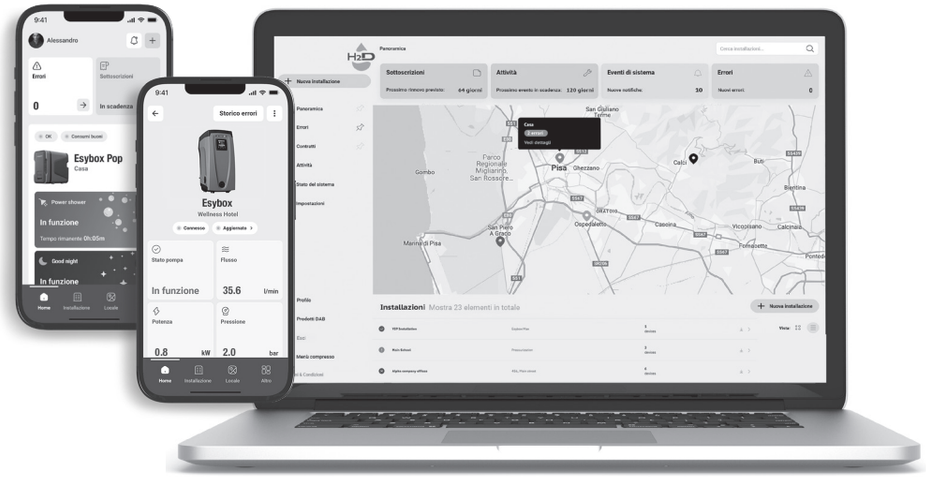

H_2D FOR PROFESSIONALS

H_2D simplifies and streamlines work routines, allowing for precise configuration of all parameters.

SEE THE FUTURE OF YOUR BUSINESS THROUGH A NEW LENS

Desktop and mobile solutions work together seamlessly. With user-friendly access on your smartphone, it's never been easier to communicate with pumps on site or keep an eye on your systems from anywhere. From your desktop, you can dive deeper into data analysis. You can easily enhance workflow, improve customer service, and grow your business.

OPTIMIZE TIME ON THE JOB

H_2D allows systems to be controlled remotely and, where needed, work on site is easier to plan.

PROBLEM FIXED FIRST TIME, EVERY TIME

H_2D provides all the info you need to prepare for the job on site where required.

LITTLE OR NO DISRUPTION

Remote monitoring allows you to address potential issues and prevent disruptions.

MORE SERVICE AND LESS URGENT CALLOUTS = INCREASED PROFIT


With remote monitoring, we offer a 24/7 service that includes preventive maintenance services, helping to avoid emergencies.

SATISFIED CUSTOMERS

With parameters optimized remotely, the system ensures consistently smooth operation.

FROM DCONNECT TO H_2D

H_2D replaces and improves on DConnect. Latest generation DAB products connect effortlessly to H_2D.

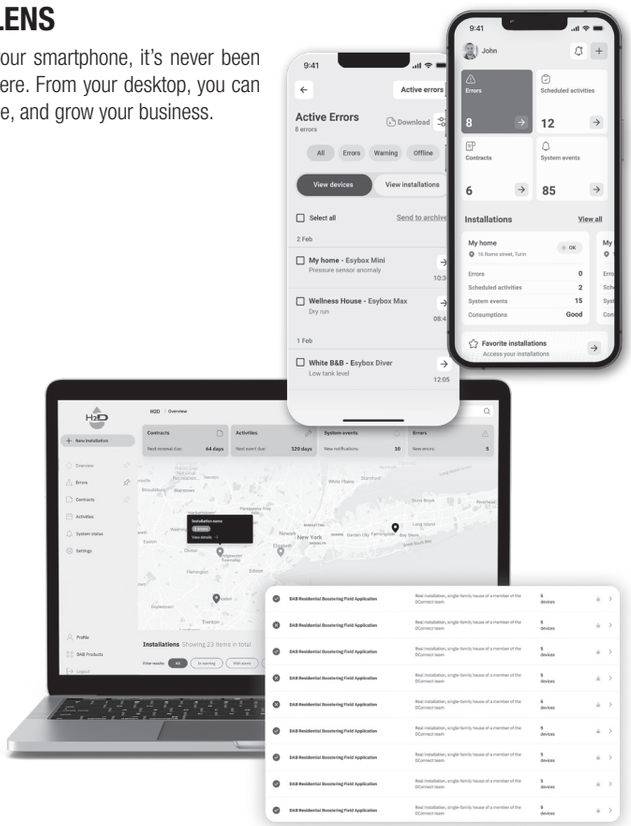

H_2D DIGITAL SERVICE

THE SMART PLATFORM FOR MANAGING DAB DEVICES REMOTELY

H_2D FOR HOMEOWNERS AND END USERS

H2D is a tool designed to help you manage water use effectively, optimizing consumption, costs, and comfort.

OVERVIEW


H_2D makes it super easy to get a real-time overview of your usage and device operating status. If any issues arise, you can contact support immediately, regardless of your location.

SMART HOME. TALK WITH ESYBOX!

You can activate comfort modes by speaking to voice assistants like Alexa and Google Home. For example, you can say, “Alexa, activate Power Shower.”

COMFORT FUNCTIONS

You can access these functions through an app, allowing you to customize the system’s performance and features to balance comfort and energy consumption.

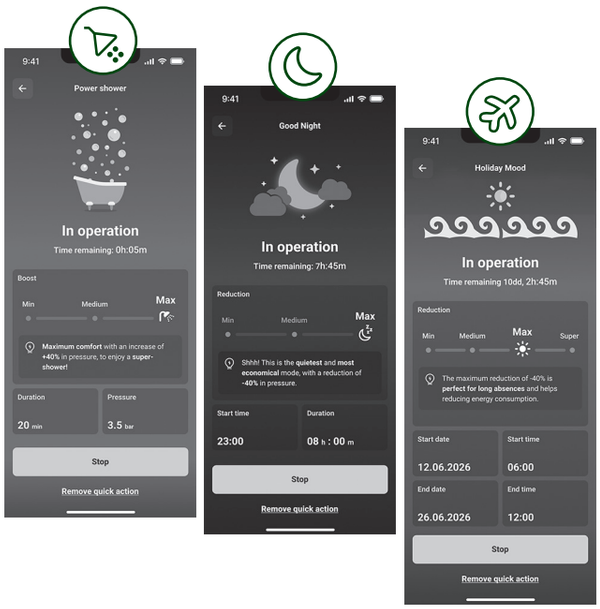

POWER SHOWER

Turn a regular shower into a “power shower”: this feature increases water pressure just for the time it takes to shower, while reducing usage for the rest of the day.

GOOD NIGHT

During the night — or when taking a quick nap — you can turn on sleep mode: this switches the already quiet pump to whisper-quiet operation. And it also helps reduce consumption.

HOLIDAY MOOD (For Esybox Pop only)

This important feature helps minimize device activity, thereby saving energy during vacations or extended periods when you are away.

INSTALL H_2D NOW!

GET IT ON Google Play

Download on the App Store

LEARN MORE
H2D.COM/EN

HOW TO USE H_2D

ACCESSORIES

ESYBOX DIVER

	DESCRIPTION
	**NFC LEVEL SENSOR** Connected to the DConnect Box 2, it monitors the water level in the tank and communicates it to the user via the app.
	**NFC FLOAT** Detects the water level in the tank, preventing the tank from being emptied and the pump from running dry due to too low a water level.
	**DOC68** With DOC68, EsyBox Diver can also be installed outdoors as a surface pump. IP68-certified.
	**SUCTION KIT FOR X VERSION** Combined with the X version, it allows water to be drawn up to a level that prevents the pumping of dust and sludge from the bottom of pits and tanks.

DAB
MAKING WATER EASY

Via Marco Polo, 14 - 35035 Mestrino (PD) Italy
Tel. +39.049.5125000 - Fax +39.049.5125950
www.dabpumps.com

DAB PUMPS INC.
3226 Benchmark Drive
Ladson, SC
SC 29456, **USA**

Tel +1-843-797-5002
email: *service.us@dabpumps.com*

DNA
PUMPS SELECTOR

On-line selection tool

DAB PUMPS LTD.
Unit 6 Gilberd Court
Newcomen Way, Severalls Park
CO4 9WN
Colchester
ordersuk@dwtgroup.com
Tel. +44 0333 777 5010

DAB PUMPS IBERICA S.L.
Av. Ajalvir, 46
Parcela 8
28806 Alcalá de Henares - Madrid
Spain
Info.spain@dwtgroup.com
Tel. +34 91 6569545

DAB PUMPS SOUTH AFRICA (PTY) LTD
Twenty One industrial Estate,
16 Purlin Street, Unit B, Warehouse 4
Olifantsfontein -1667 - South Africa
info.sa@dwtgroup.com
Tel. +27 12 361 3997

DAB PUMPS BV
'tHofveld 6 C1
1702 Groot Bijgaarden - Belgium
info.belgium@dwtgroup.com
Tel. +32 2 4668353

DAB PUMPS HUNGARY KFT.
H-8800
Nagykanizsa, Buda Ernő u.5
Hungary
Tel. +36 93501700

DAB PUMPS (QINGDAO) CO. LTD.
No.10 Xindong Road
Jiulong Town,
Jiaozhou City
266319 Qingdao (Shandong) - China
sales.cn@dwtgroup.com
Tel. +86 400 186 8280

DAB PUMPS B.V.
Statenlaan, 4
5223 LA, 's-Hertogenbosch
Nederland
info.nl@dabpumps.com
Tel. +31 416 387280

DAB PUMPS POLAND Sp. z o.o.
Ul. Cieślewskich 35K
03-017 Warszawa - Poland
sprzedaz@dabpumps.com.pl
Tel. +48 22 307 84 56

DAB PUMPS OCEANIA PTY LTD
426 South Gippsland Highway,
Dandenong South VIC 3175 – Australia
info.oceania@dwtgroup.com
Tel. +61 1300 378 677

DAB PUMPS FRANCE SAS
Tour Ariane, Paris la Défense 9
5, Place de la Pyramide
92800 Puteaux - France
info.fr@dabpumps.com
Tel. +33 (0)6 79 63 05 46
+33 (0)7 89 01 53 35

DAB PUMPS CANADA INC.
333 Bay Street, Suite 4600, Toronto,
Ontario, M5H 2S5, - Canada
orders@dwtgroup.ca
Tel. 1-833-322-7867

PT DAB PUMPS INDONESIA
Satrio Tower lantai 26
unit C-D, Jl. Prof. Dr. Satrio Kav. C4,
Kel. Kuningan Timur, Kec. Setiabudi, Kota Adm.
Jakarta Selatan, Prov. DKI Jakarta. - Indonesia
Tel. +62 2129222850

DAB PUMPS GMBH
Am Nordpark 3
D - 41069 Mönchengladbach - Germany
info.germany@dwtgroup.com
Tel. +49 2161 47388-0
Fax +49 2161 47388-36

DAB PUMPS DE MÉXICO, S.A. DE C.V.
Av Amsterdam 101 Local 4
Col. Hipódromo Condesa,
Del. Cuauhtémoc CP 06170
Ciudad de México
Tel. +52 55 553 2621