



ECOPLUS Replacement

CSA certified




- Driving innovation
- Ensuring quality and safety
- Providing peace of mind
- Identifying potential safety risks
- Reducing environmental impact
- Enhancing trade




ECOPLUS vs EUROINOX

	ECOPLUS 230	EUROINOX 30/506	ECOPLUS 240	EUROINOX 40/506	ECOPLUS 250	EUROINOX 50/506
Voltage	115v Single voltage	115 / 230v Dual Voltage	115v Single voltage	115 /230v Dual Voltage	115v Single voltage	115-230v Dual Voltage
P1 Watts / Hp	800w / 0.5Hp	940 w /0.75 Hp	1000w / 0.75 Hp	1300w / 1.1 Hp	1250w / 1 Hp	1500w/1.36 Hp
Amps	8.0	8.31 / 4.28	10.0	13.0 / 6.6	13.0	14.6 / 7.4
Liquid temp	32°F to 95°F	32°F to 104°F	32°F to 95°F	32°F to 104°F	32°F to 95°F	32°F to 104°F
Max Suction	26 ft	26 ft	26 ft	26 ft	26 ft	26 ft
Max Head	118 ft	138 ft	157 ft	190 ft	197 ft	236 ft
Max pressure	51 psi	60 psi	68 psi	82 psi	85 psi	102 psi
Max flow	27gpm	22 gpm	27 gpm	22 gpm	27 gpm	22 gpm
Pump length	16"	15.1"	17"	18"	18 "	18"
Pump width	8.5"	6.9"	8.5"	6.9"	8.5"	6.9"
Pump Height	8.7"	5.6"	8.7"	5.6"	8.7"	5.6"
Pump Weight	19 lbs	23.1 lbs	26 lbs	32.2 lbs	27.4 lbs	33.3 lbs

ECOPLUS 230 vs EUROINOX 30/506

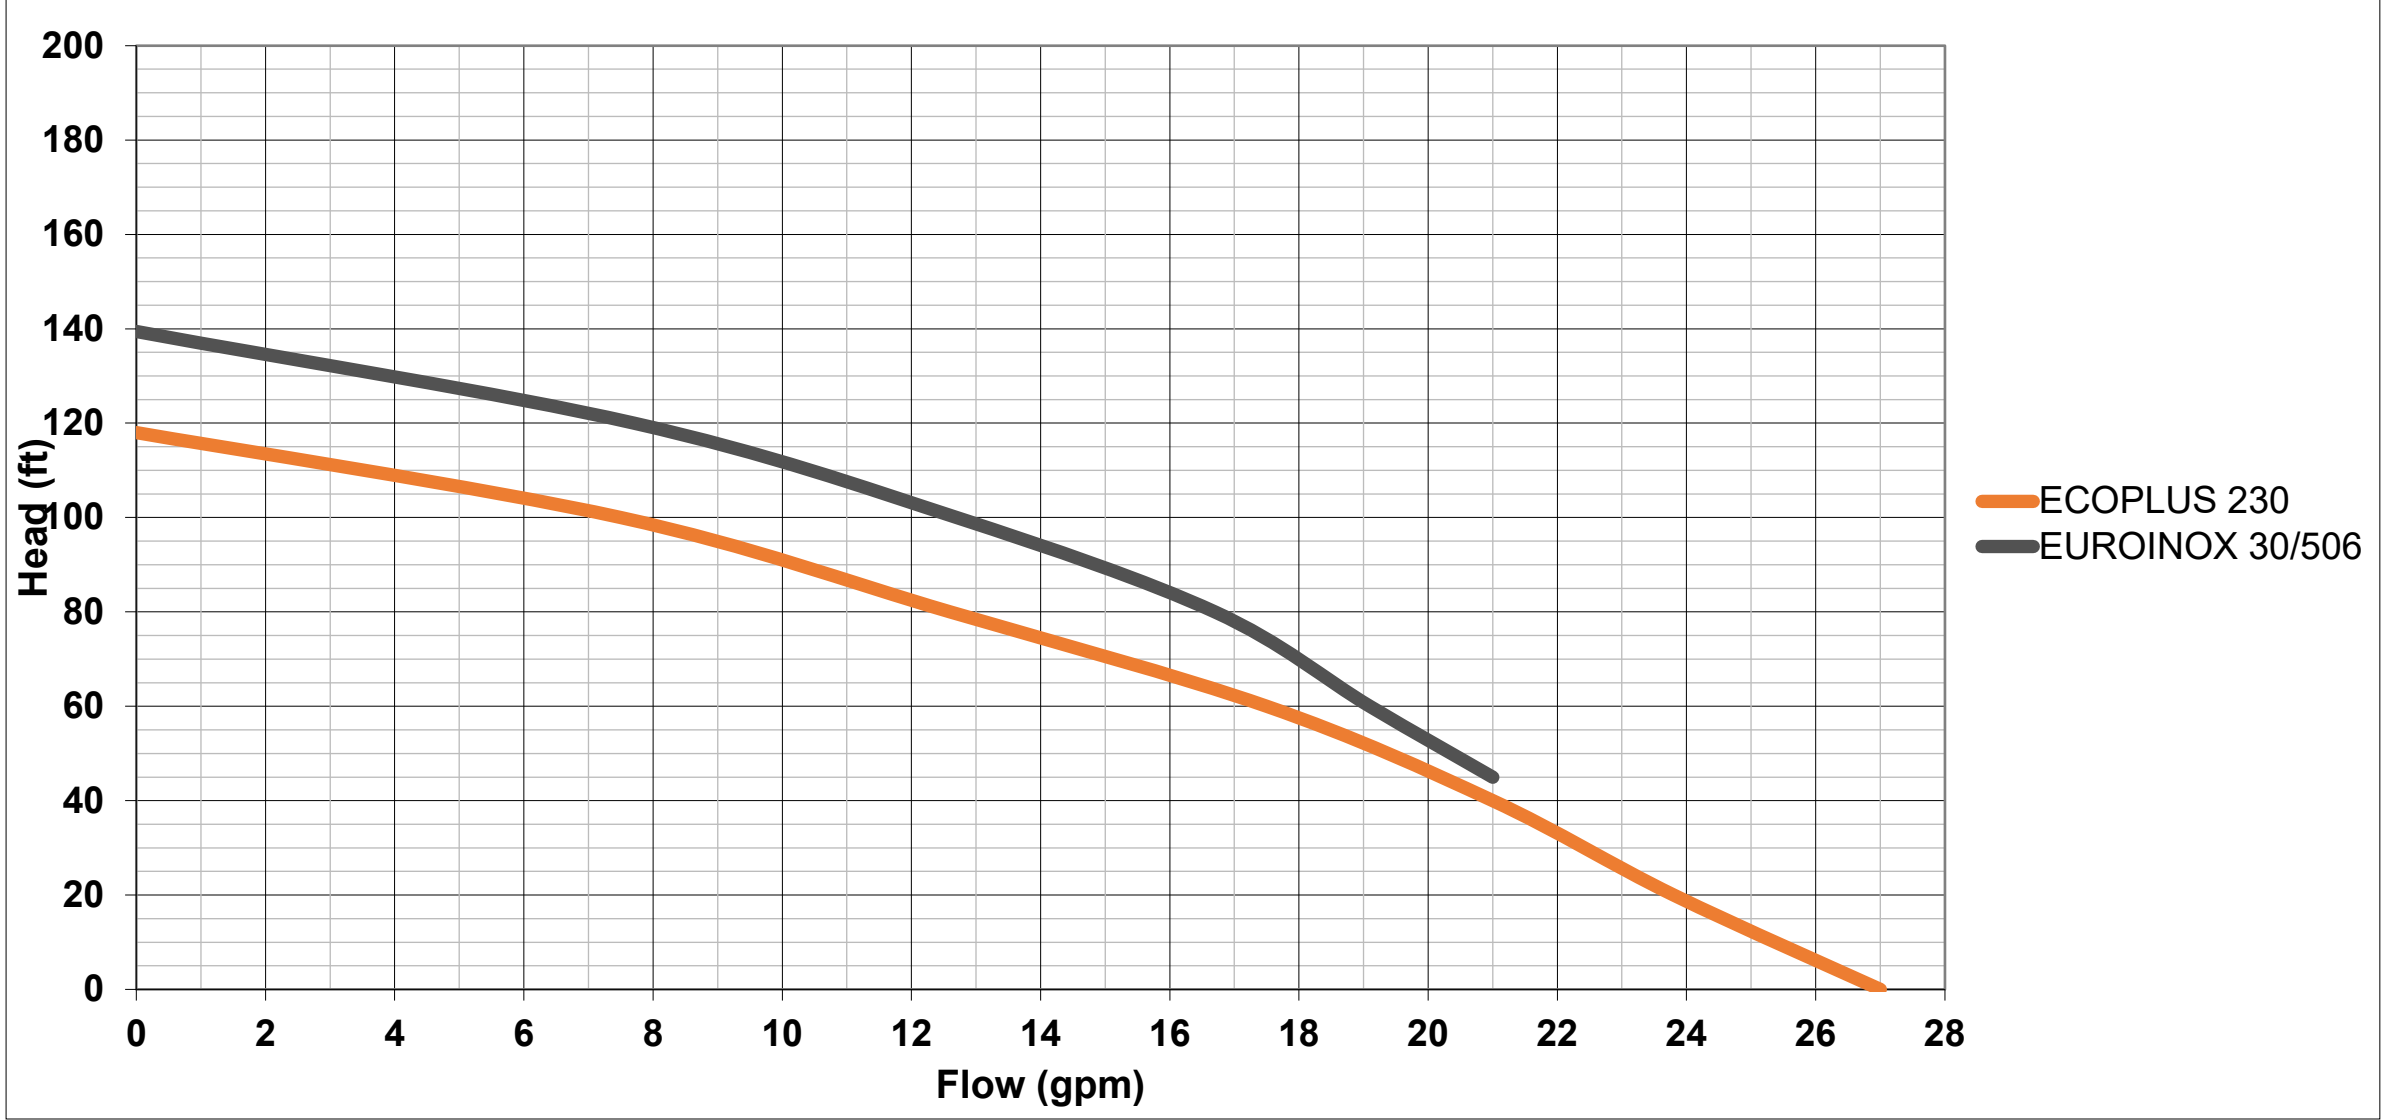

ECOPLUS 240 vs EUROINOX 40/506

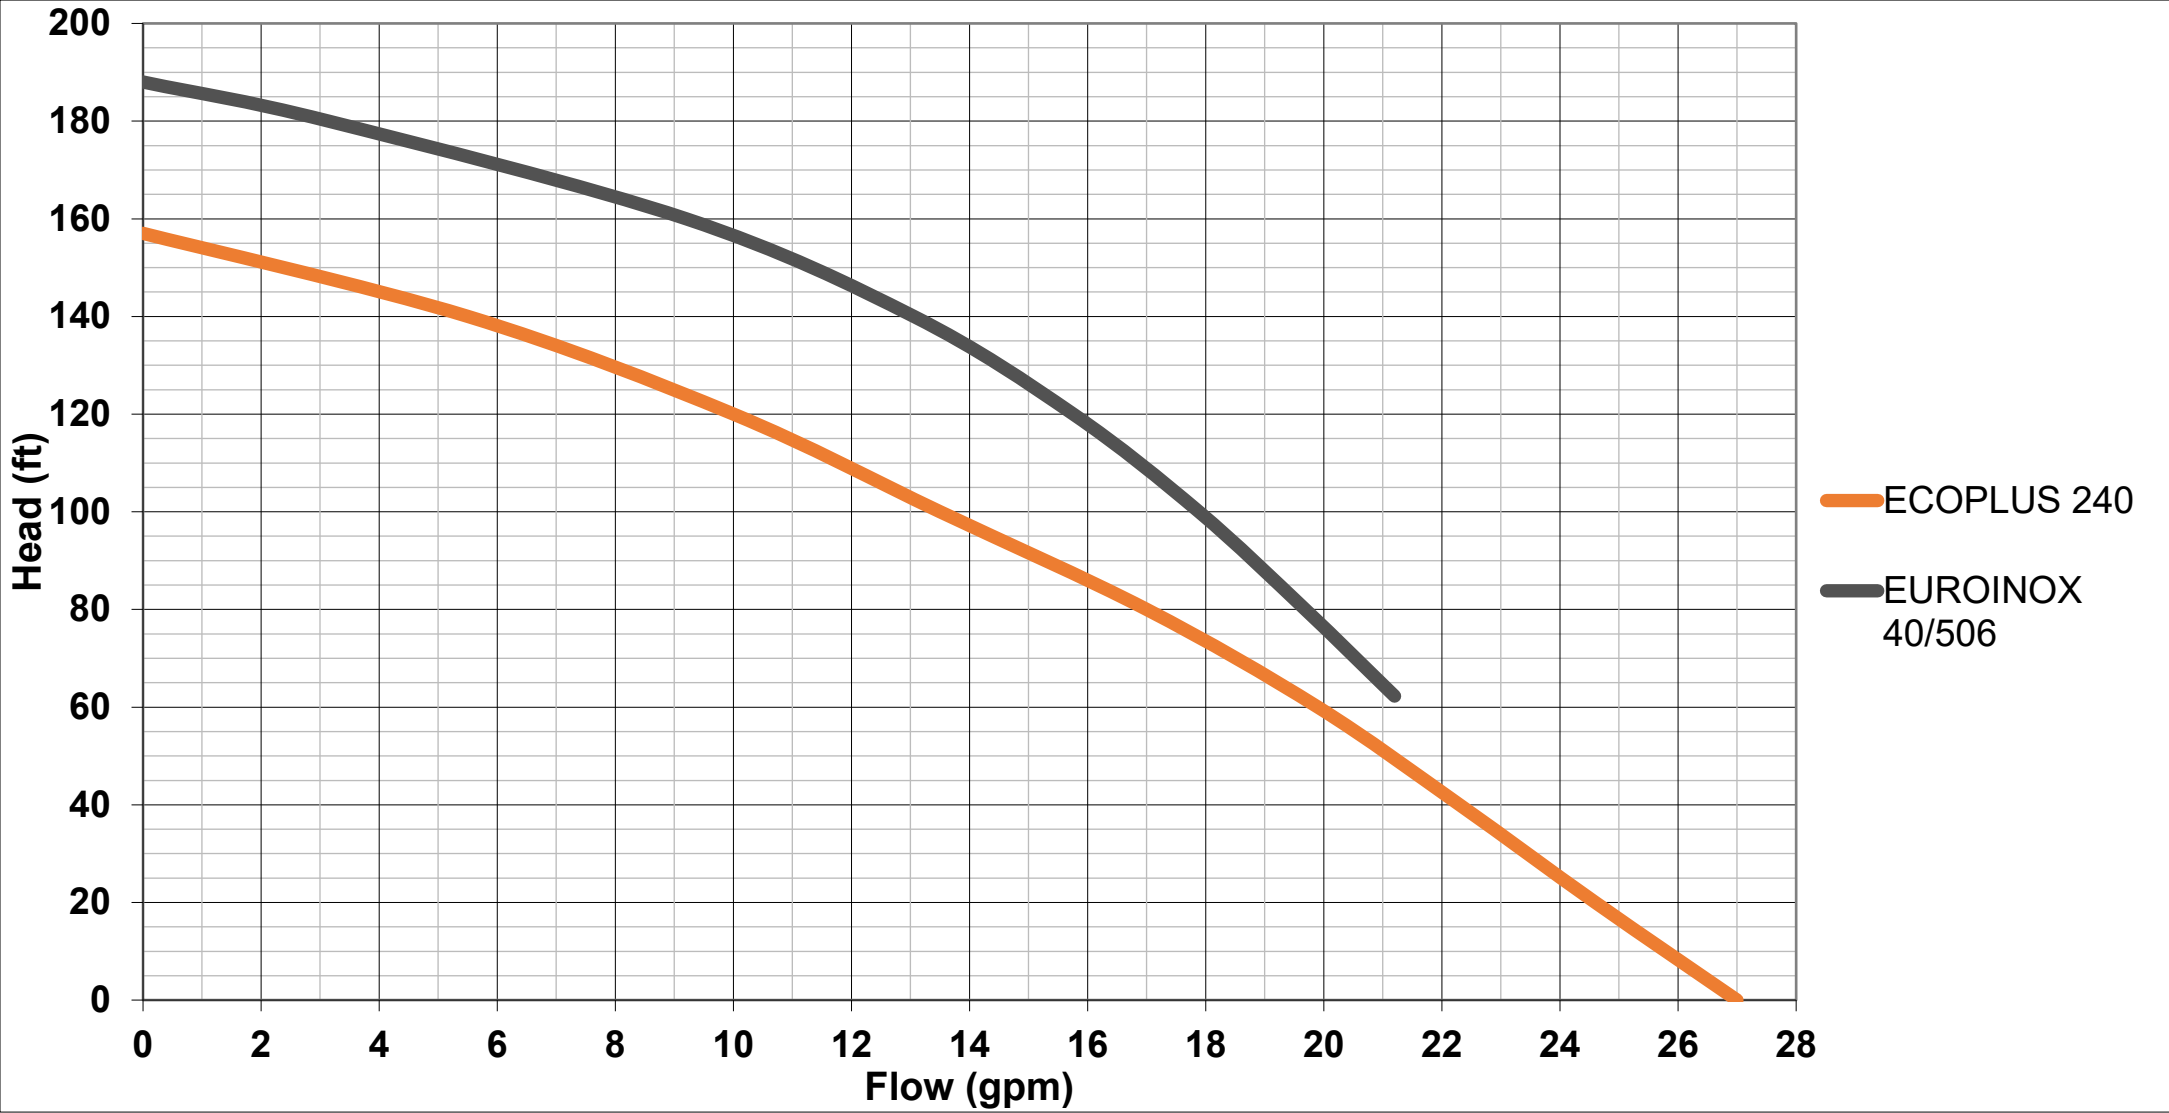

ECOPLUS 250 vs EUROINOX 50/506

