

# ECOSUB Replacement



# CSA certified



- Driving innovation
- Ensuring quality and safety
- Providing peace of mind
- Identifying potential safety risks
- Reducing environmental impact
- Enhancing trade




# LEADER ECOSUB Replaced by DAB NOVA




# ECOSUB vs NOVA

	ECOSUB 400	NOVA 180 M-NA	ECOSUB 410	NOVA 200 M-NA	ECOS 420	NOVA 600 M-NA
Voltage	115v	115v	115v	115v	115v	115v
P1 Watts / Hp	220w / ¼ Hp	300 w /0.2 Hp	370w / 1/3 Hp	400w / 0.3 Hp	750w / ½ Hp	700w / 0.6 Hp
Amps	2.0	2.9	3.0	3.8	7.1	6.4
Liquid temp	32°F to 95°F	32°F to 122°F	32°F to 95°F	32°F to 122°F	32°F to 95°F	32°F to 122°F
Cable Length	16 ft	16 ft	16 ft	16 ft	16 ft	16 ft
Max Head	20 ft	16ft	23 ft	18.5 ft	30 ft	33.3 ft
Max solids	½”	0.4”	½”	0.4”	½”	0.4”
Max flow	29gpm	39 gpm	37 gpm	46 gpm	66 gpm	66 gpm
Discharge	1 ¼ “ NPT	1 ¼ “ NPT	1 ¼ “ NPT	1 ¼ “ NPT	1 ¼ “ NPT	1 ¼ “ NPT
Pump Dia	5 ½”	5.9 ”	5 ½”	5.9 ”	5 ½”	7.4”
Pump Height	10 5/8”	10.6”	10 5/8”	10.6”	12”	13”
Pump Weight	7.7 lbs	10.1 lbs	8.2 lbs	10.1 lbs	11.4 lbs	15.4 lbs


# ECOSUB 400 vs NOVA 180 M-NA

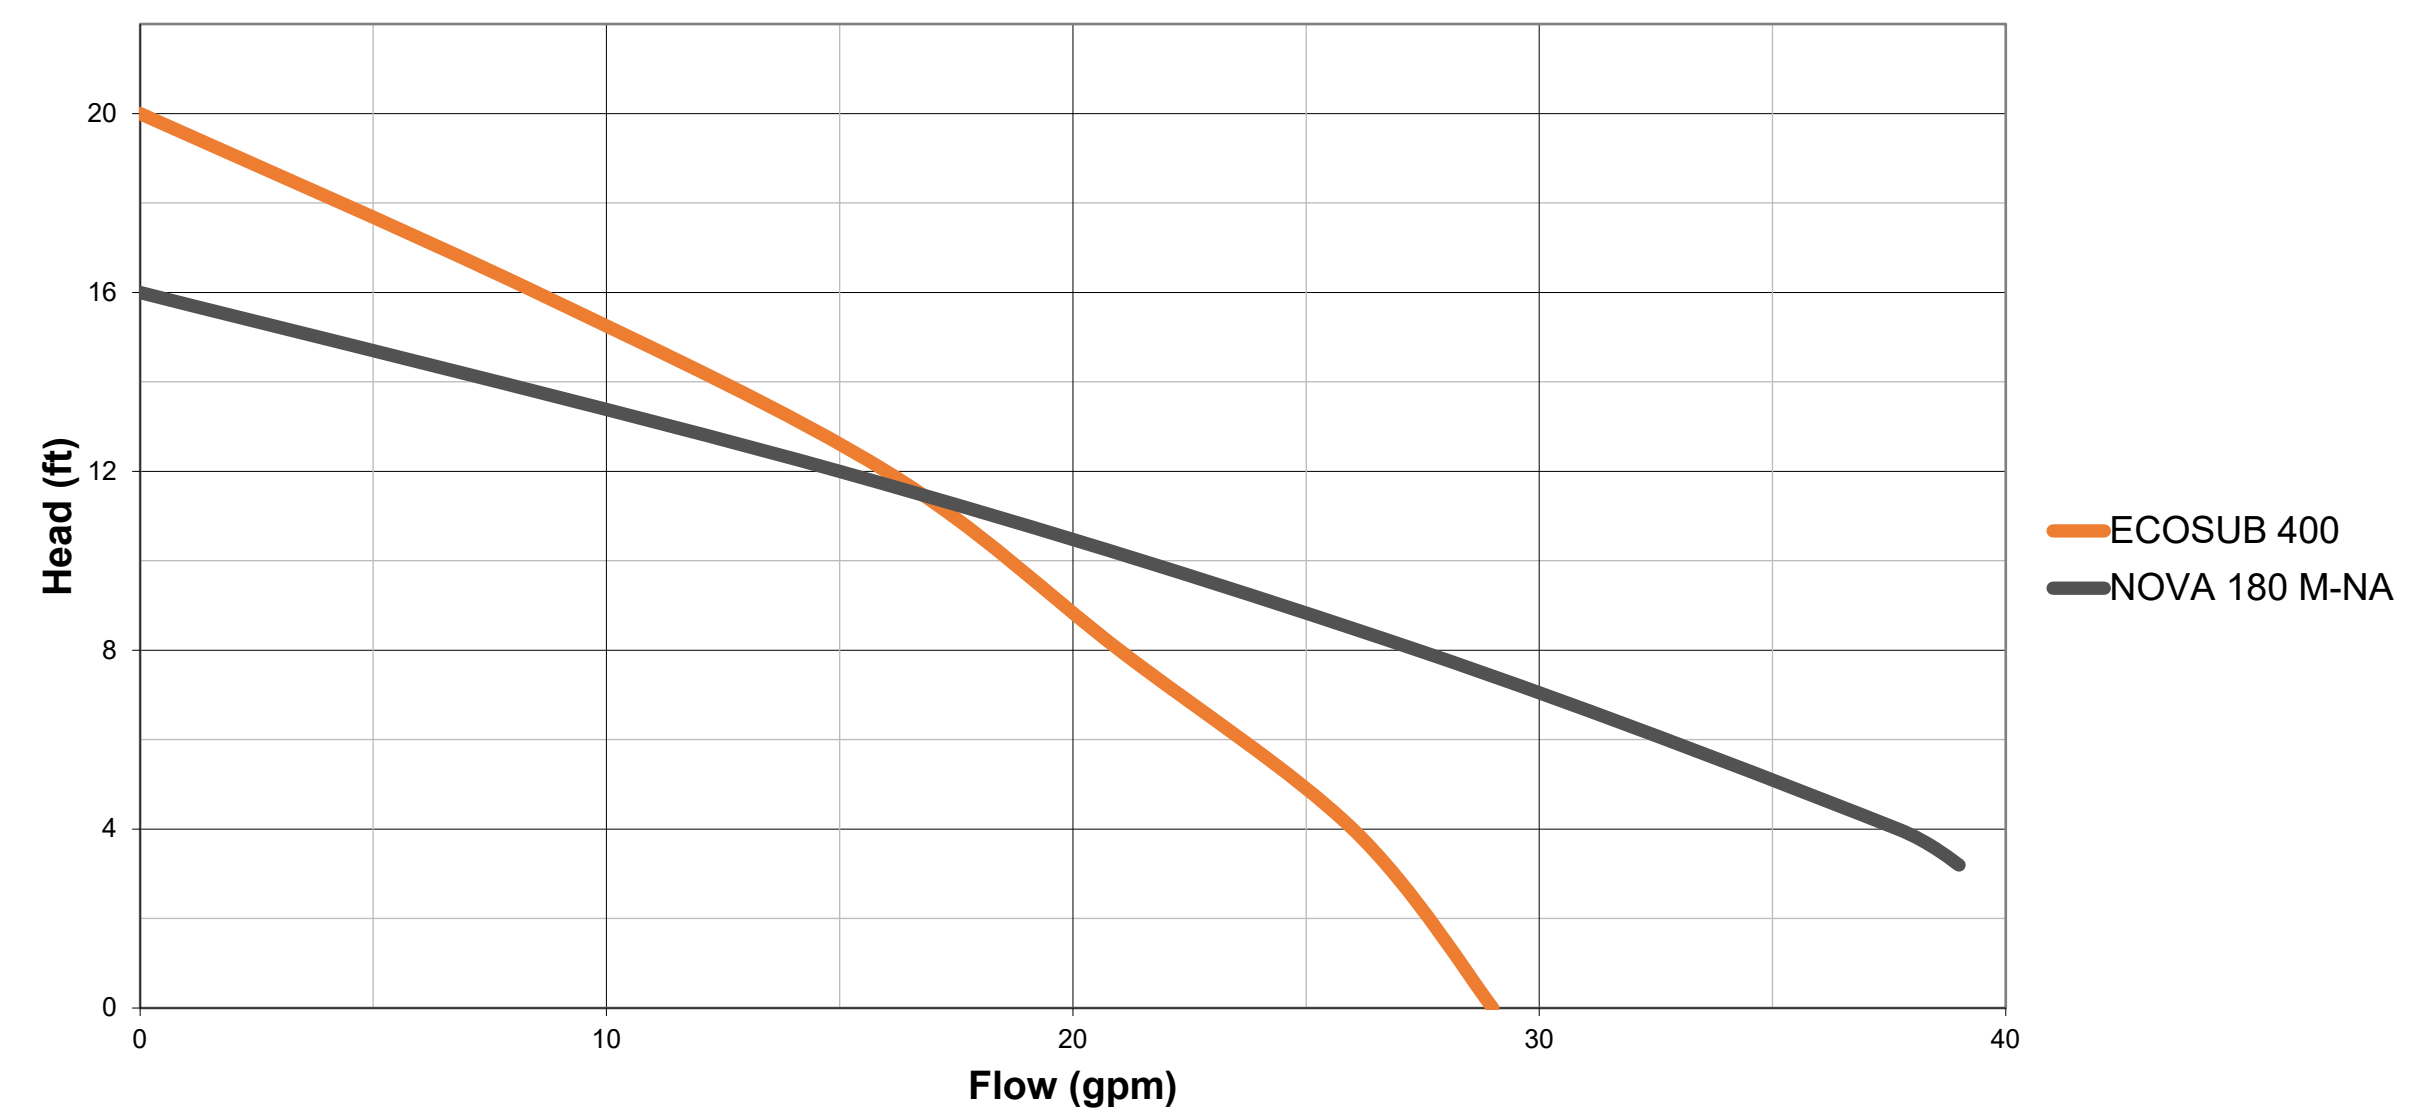

# ECOSUB 410 vs NOVA 200 M-NA

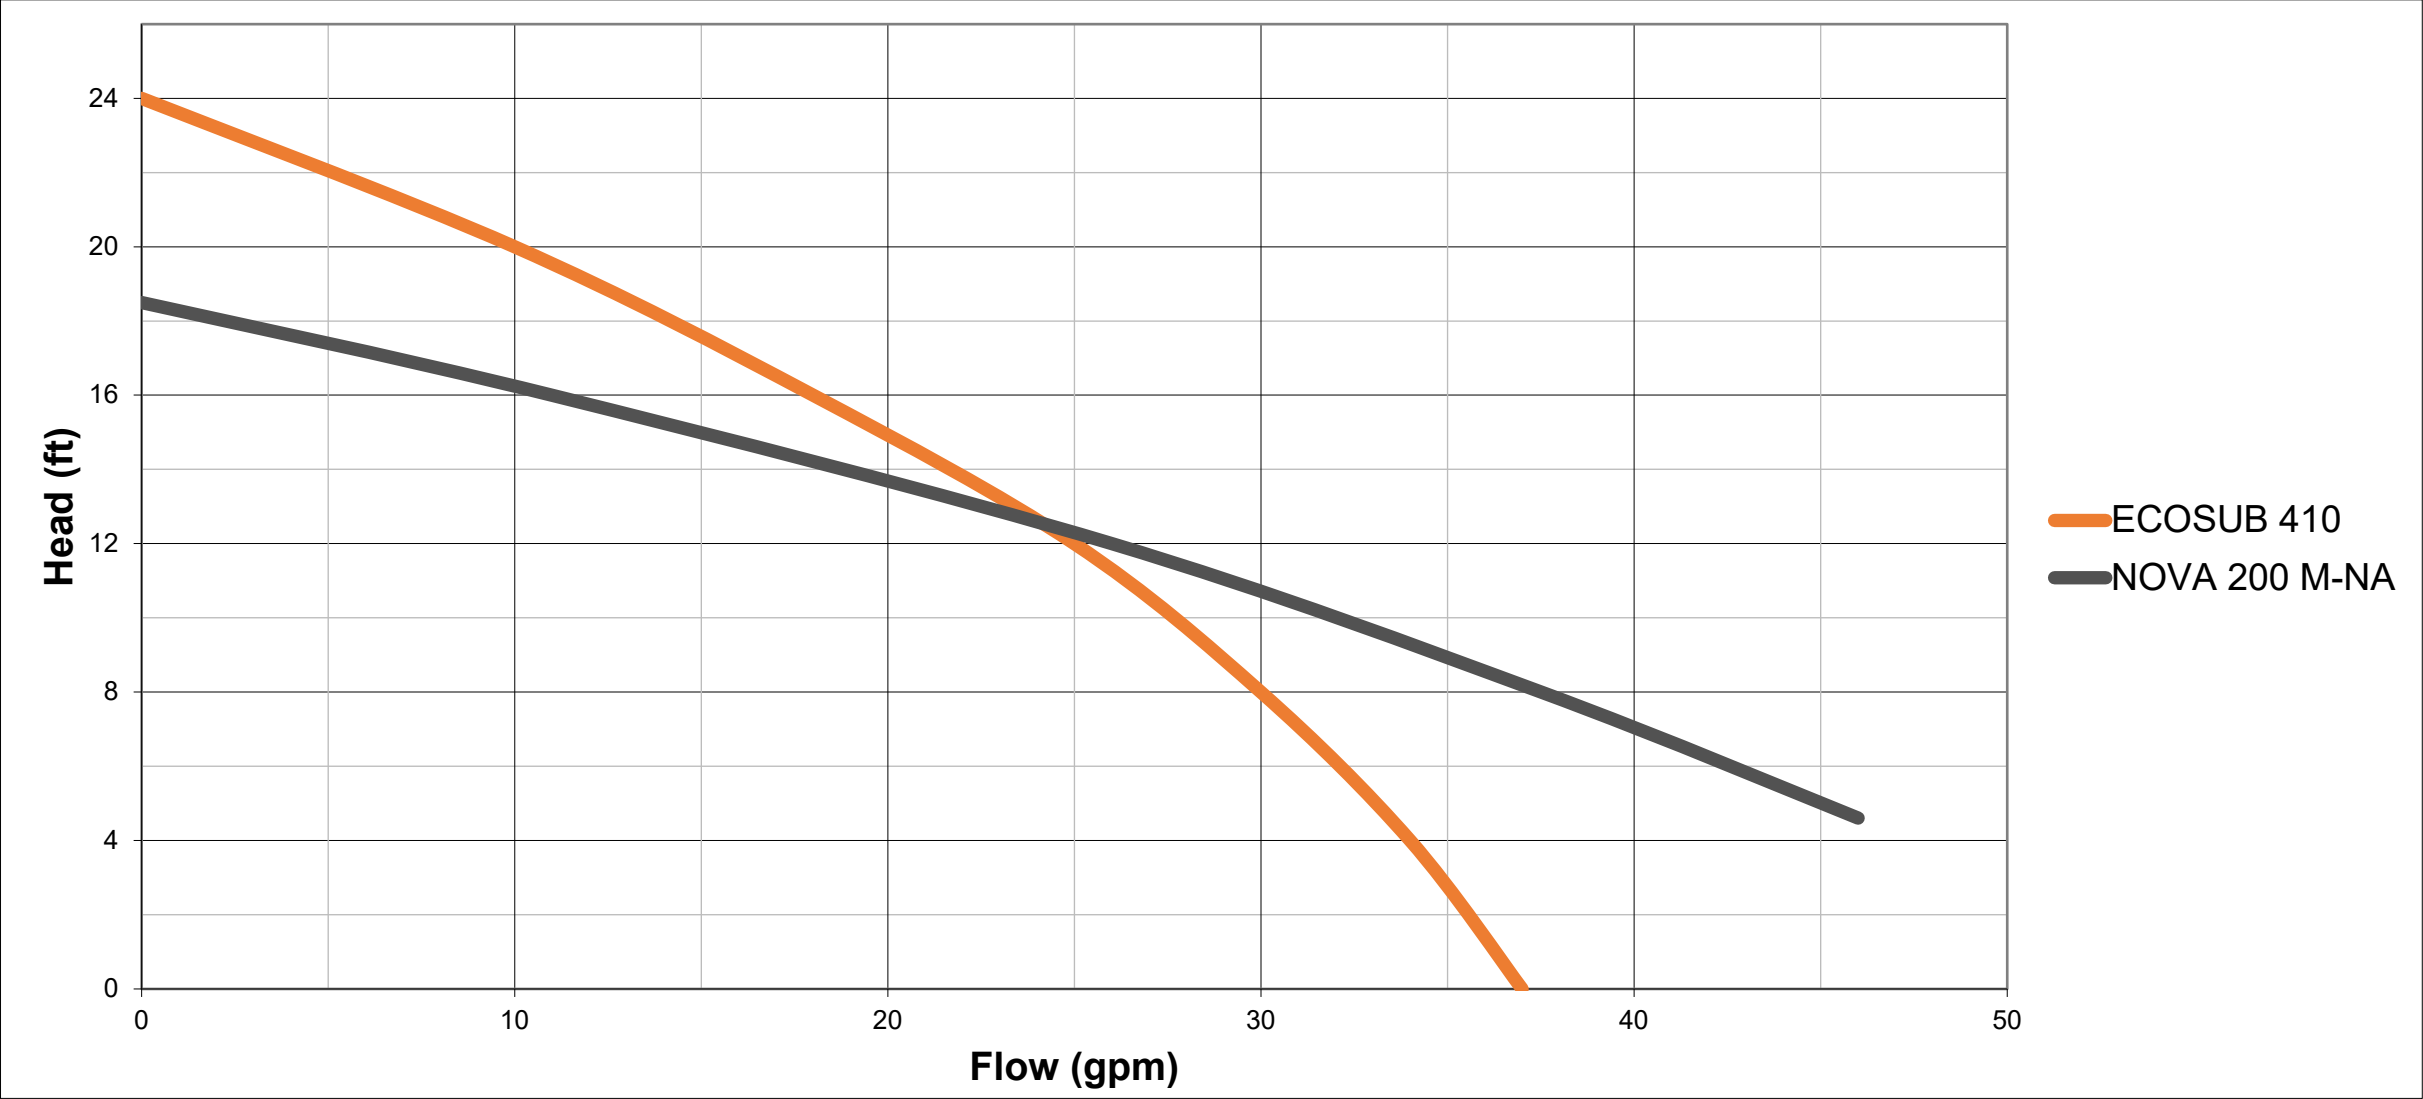


# ECOSUB 420 vs NOVA 200 M-NA

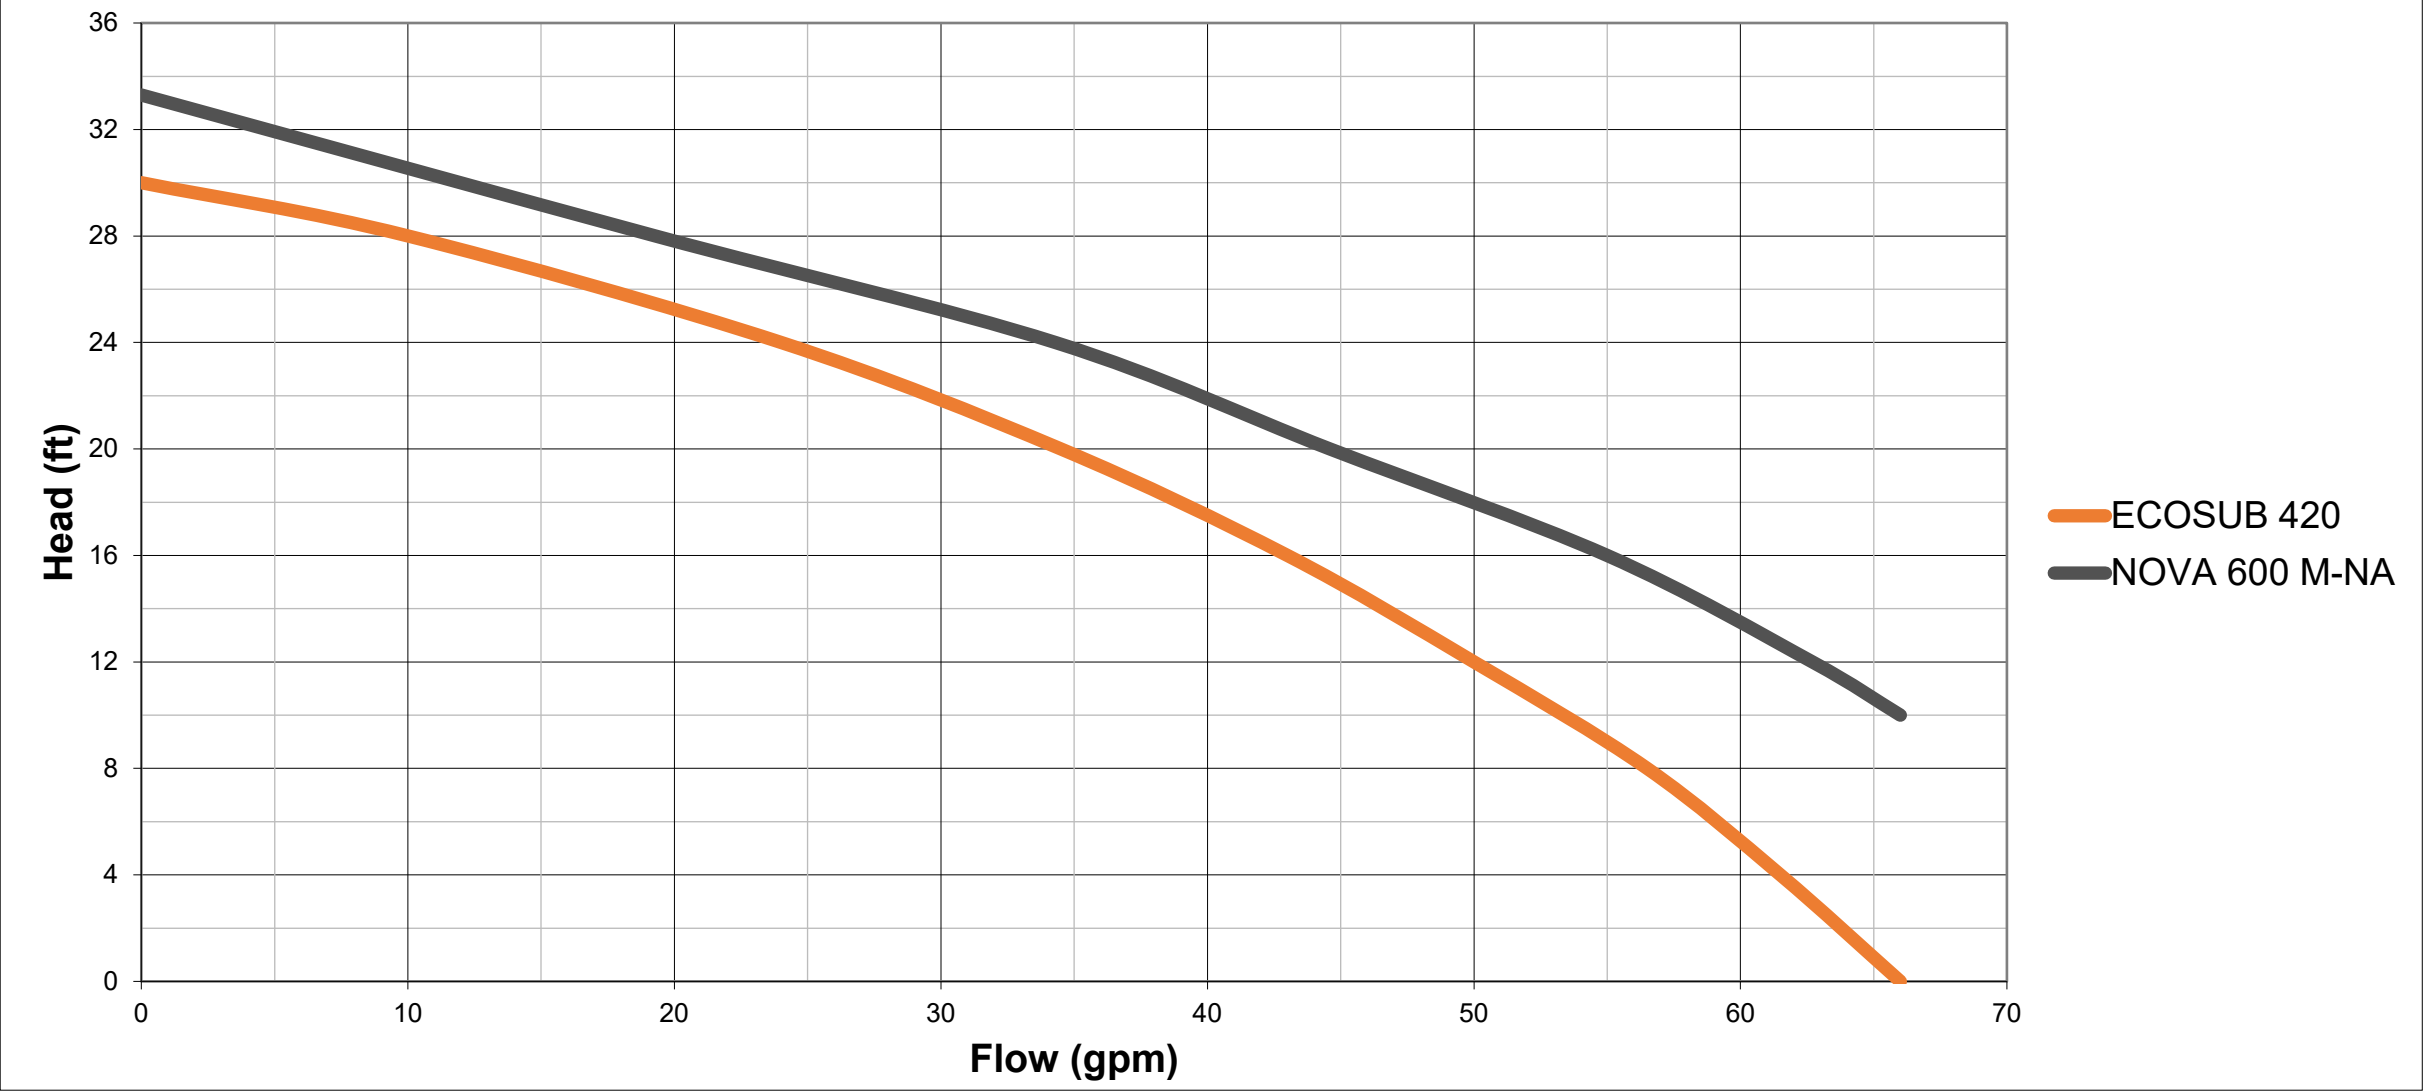

# ECOSUB vs NOVA

	NOVA 180 M-A	ECOSUB 410A	NOVA 300 M-A	ECOS 420	NOVA 600 M-A
Voltage	115v	115v	115v	115v	115v
P1 Watts / Hp	300 w / 0.2 Hp	370w / 1/3 Hp	400w / 0.3 Hp	750w / ½ Hp	700w / 0.6 Hp
Amps	2.9	3.0	3.8	7.1	6.4
Liquid temp	32°F to 122°F	32°F to 95°F	32°F to 122°F	32°F to 95°F	32°F to 122°F
Cable Length	16 ft	16 ft	16 ft	16 ft	16 ft
Max Head	16ft	23 ft	18.5 ft	30 ft	33.3 ft
Max solids	0.4"	½"	0.4"	½"	0.4"
Max flow	39 gpm	37 gpm	52 gpm	66 gpm	66 gpm
Discharge	1 ¼ " NPT	1 ¼ " NPT	1 ¼ " NPT	1 ¼ " NPT	1 ¼ " NPT
Pump Dia	5.9 "	5 ½ "	5.9 "	5 ½ "	7.4"
Pump Height	10.6"	10 5/8"	10.6"	12"	13"
Pump Weight	10.1 lbs	8.2 lbs	10.1 lbs	11.4 lbs	15.4 lbs

# ECOSUB 410A vs NOVA 300 M-A

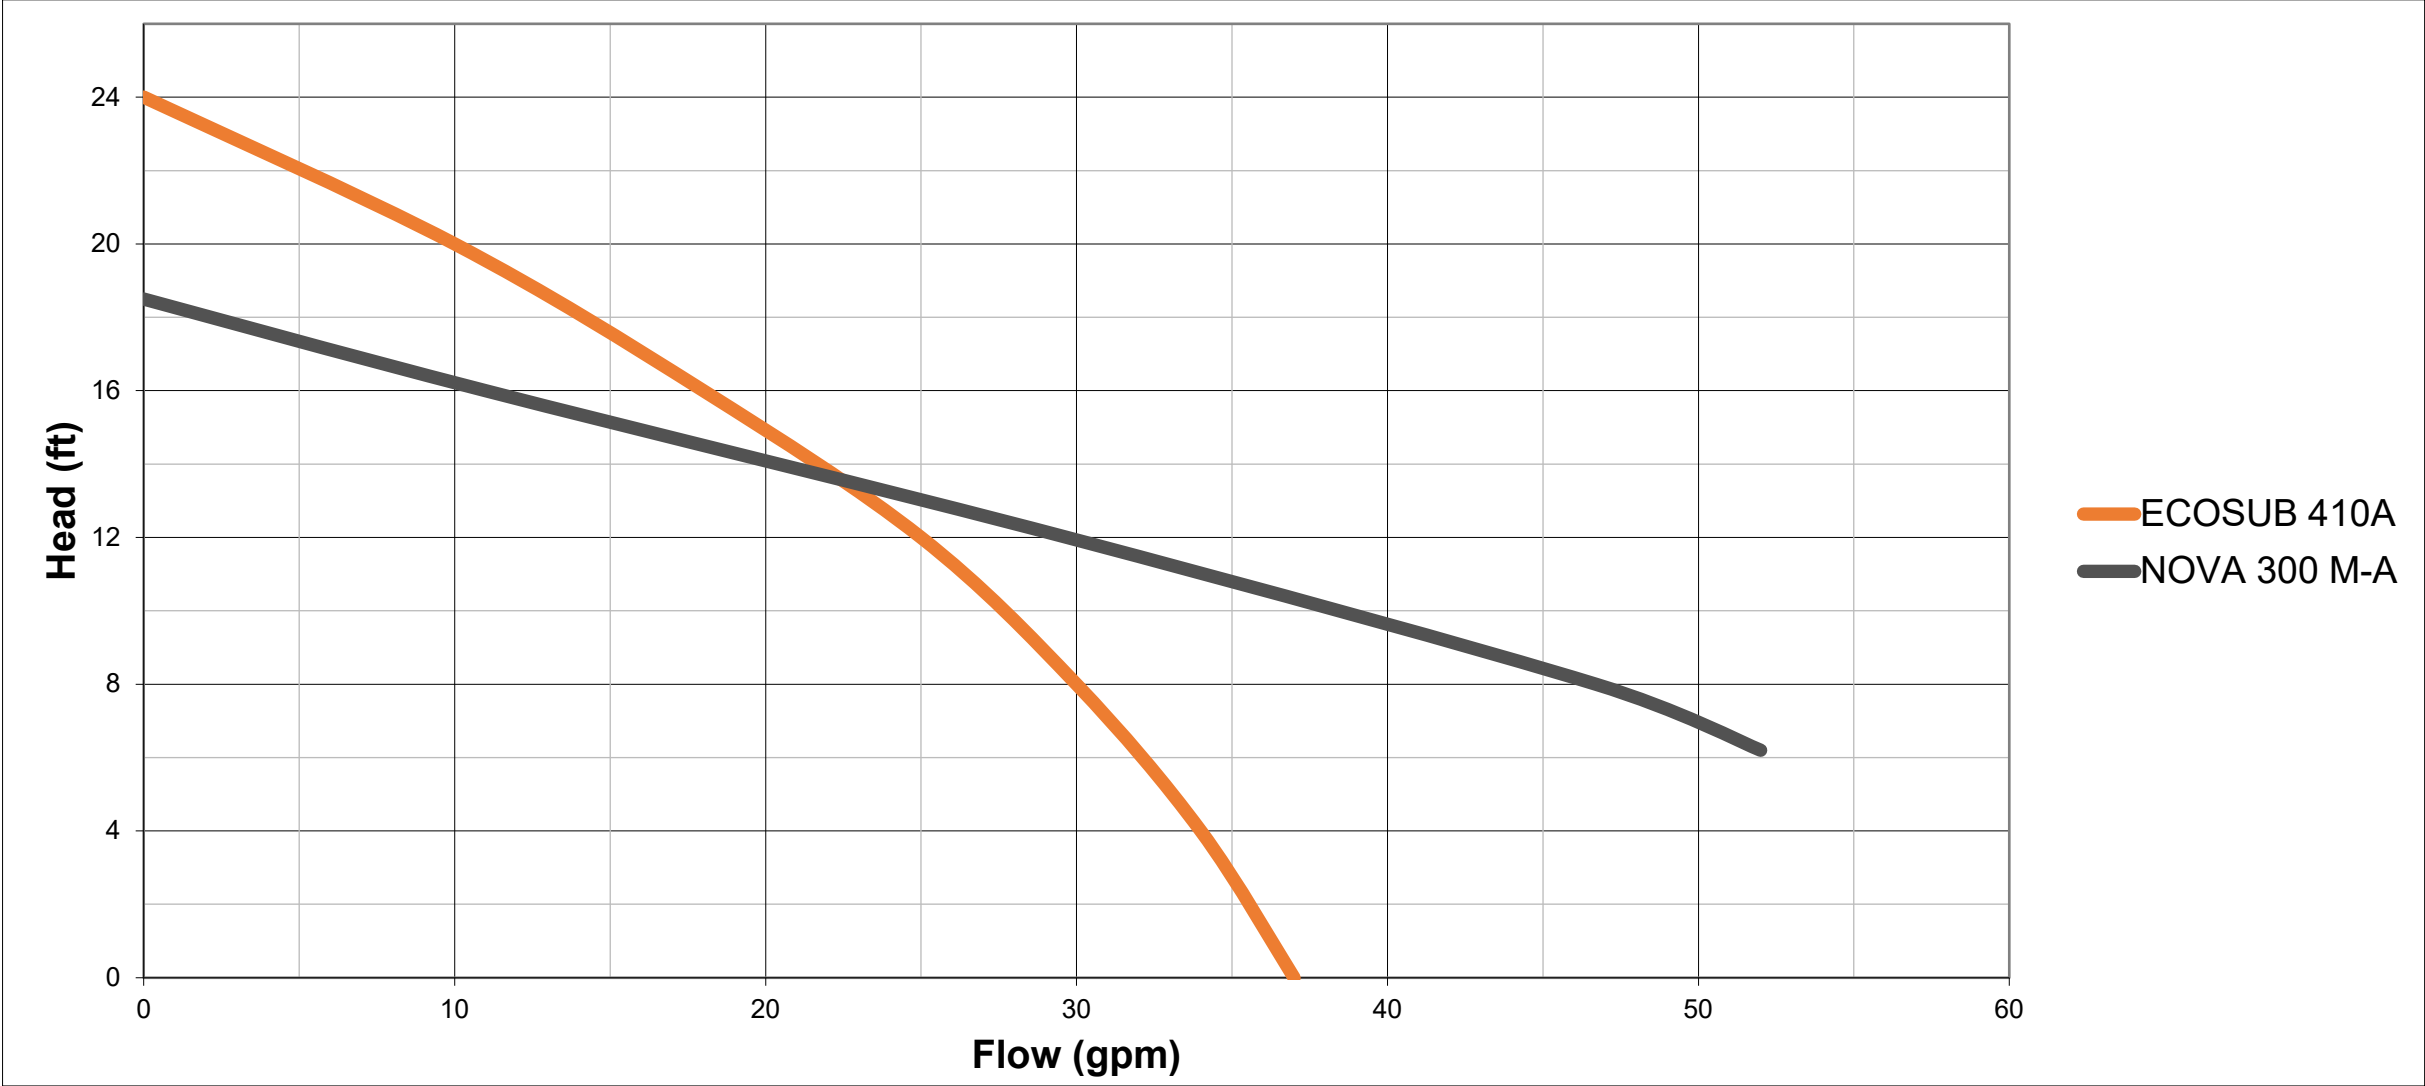



# ECOSUB 420A vs NOVA 600 M-A

